

AD-A033 632


KINERGETICS INC TARZANA CALIF
FINAL TECHNICAL REPORT, (U)
APR 76 M O BENNETT, R C LINS
CP-2028F

F/G 15/1


DAAK02-73-C-0323
NL

UNCLASSIFIED

1 OF 1
AD-A
033 632

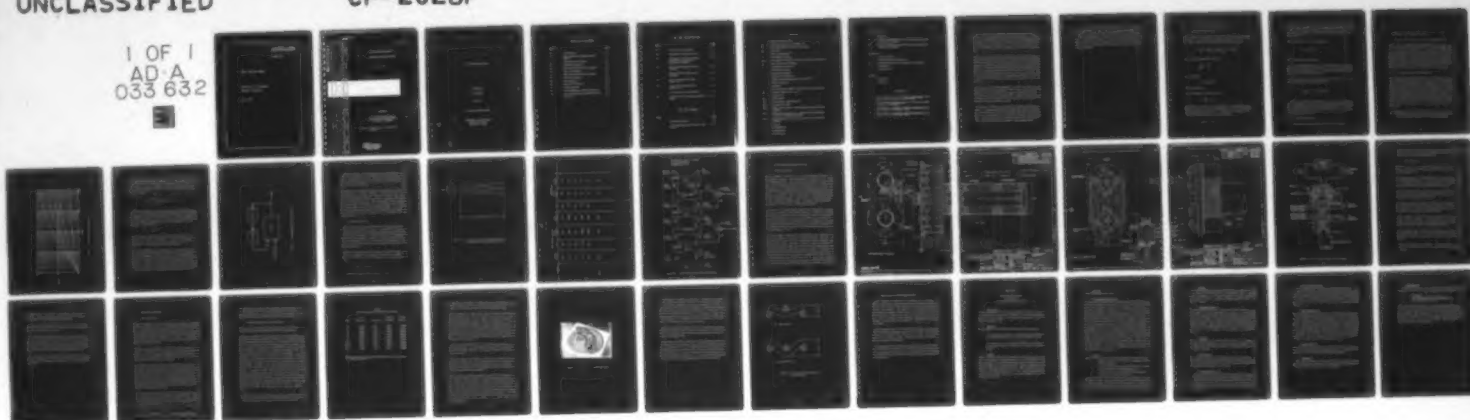

END
DATE
FILMED
2-4-77
NTIS

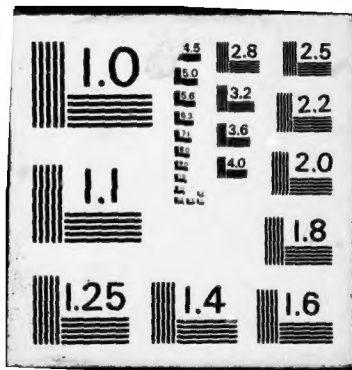

U.S. DEPARTMENT OF COMMERCE
National Technical Information Service

AD-A033 632

FINAL TECHNICAL REPORT

KINERGETICS, INCORPORATED
TARZANA, CALIFORNIA

APRIL 1976

ADA033632

365006

CP-2028

FINAL TECHNICAL REPORT

CONTRACT DAAK02-73-C-0323

April 1976

Prepared For

U. S. Army Mobility Equipment
Research and Development Center
Fort Belvoir, VA 22060

Approved for public release, distribution
Unlimited.

REPRODUCED BY
NATIONAL TECHNICAL
INFORMATION SERVICE
U. S. DEPARTMENT OF COMMERCE
SPRINGFIELD, VA 22161

DDC
RECEIVED
DEC 15 1976
RESERVED
C

FINAL TECHNICAL REPORT

Prepared By:

M. O. Bennett
R. C. Lins

April 1976

Contract DAAK02-73-C-0323

KINERGETICS INCORPORATED
6029 Reseda Boulevard
Tarzana, CA 91356



TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
1.0	INTRODUCTION	1-1
2.0	HEAT EXCHANGER THERMODYNAMIC DESIGN	2-1
2.1	General Performance Analysis	2-1
2.2	Longitudinal Conduction	2-2
2.3	Channel Flow Unbalance and Its Reduction	2-3
2.4	Design Analysis Results	2-7
3.0	HEAT EXCHANGER PHYSICAL DESIGN	3-1
3.1	General Configuration	3-1
3.2	Detail Description	3-3
4.0	FABRICATION PROCESS	4-1
4.1	General Description	4-1
4.2	Process Refinements Initiated During Project	4-2
5.0	CONCLUSIONS AND RECOMMENDATIONS	5-1
	APPENDIX A	A-1

LIST OF ILLUSTRATIONS

<u>Figure</u>		<u>Page</u>
2-1	Conductivity of a Packed Bed	2-4
2-2	Unbalanced Flow Control Schematic	2-6
2-3	Illustration of how Flow Compensation Technique is Incorporated into Counter-Flow Exchanger	2-8
2-4	Heat Exchanger Thermodynamic State Schematic	2-10
3-1	Physical Schematic Diagram of Heat Exchanger	3-2
3-2	Layout -- Heat Exchanger System (Sheet 1 of 2)	3-4
3-3	Layout -- Heat Exchanger System (Sheet 2 of 2)	3-5
4-1	Lamina Fixture with Lamina Installed	4-5
4-2	Examples of Variation in Thickness of Woven Screen	4-7

LIST OF TABLES

<u>Table</u>		<u>Page</u>
I	Design Analysis Results	2-9
II	Wire Screens Usable with 0.010-inch Thick Plastic	4-3

NOTATION

A_c	= effective flow area (τA_f)
A_k	= conduction area of wire in the plastic wall
A_f	= heat transfer area for one side of the exchanger
A_{fr}	= frontal area
B	= defined as $L_k(4h/kd_w)^{1/2}$
C	= heat capacity rate ($\dot{m}C_p$)
C_{min}	= heat capacity rate ($\dot{m}C_p$) for side of exchanger with smallest flow rate
C_p	= specific heat at constant pressure
d_w	= wire diameter of wire screen
f	= Fanning friction factor
G	= mass flow rate/unit area
h	= convection film coefficient
j	= Colburn modulus as obtained from $(h/C_p G)N_{Pr}^{2/3}$
k	= thermal conductivity
L	= flow length
L_k	= effective conduction length of wire between adjacent gas passages
L_{kw}	= conduction length of wire in wall
\dot{m}	= mass flow rate
N_{Pr}	= Prandtl number
NTU	= overall number of heat transfer units
NTU_A	= measured NTU ($\Delta T/ST$)
NTU_h	= number of heat transfer units for the high-pressure side of the heat exchanger
NTU_i	= number of heat transfer units for a single side in the exchanger or for conduction between adjacent sides
NTU_l	= number of heat transfer units for the low-pressure side of the heat exchanger
P	= pressure
Q	= heat transfer rate
R	= transfer function
r_h	= hydraulic radius

Notations (continued)

- T = temperature
 ΔT = temperature difference between flow entering and leaving on one side of the heat exchanger
 δT = temperature difference between entering and leaving streams at same end of the exchanger

Greek Letters

- ϵ = void volume fraction
 λ = dimensionless conduction parameters
 η_f = fin effectiveness of wire in exchanger given by $(\tanh B)/B$
 ρ = density of fluid
 μ = viscosity of fluid

Subscripts

- c = cold stream
 h = hot stream

REFERENCES

- 1) W. M. Kays and A. L. London, Compact Heat Exchangers, 2nd ed., McGraw-Hill Book Company, New York (1964).
- 2) W. H. McAdams, Heat Transmission, 3rd ed., McGraw-Hill Book Company, New York (1954).
- 3) R. B. Fleming, in: Advances in Cryogenic Engineering, Vol. 12, Plenum Press, New York (1967), p. 352.
- 4) K. W. Cowens, in: Advances in Cryogenic Engineering, Vol. 19, Plenum Press, New York (1974), p. 437.

1.0 INTRODUCTION

The objective of Contract DAAK02-73-C-0323 between Kinergetics Incorporated and the U. S. Army Mobility Equipment Research and Development Center was to demonstrate the feasibility of manufacturing compact heat exchangers by bonding wire screens into low conductivity (i.e. plastic) material and to utilize the manufacturing techniques to manufacture a set of compact, high-performance, cryogenic heat exchangers suitable for integration into a Claude cycle refrigeration system.

During the course of the program, the feasibility of manufacturing compact heat exchangers was successfully demonstrated by manufacturing several leak tight heat exchanger sections; however, it was also found that the critical manufacturing process is very sensitive to certain physical parameters of the raw material used in the process. These particular physical parameters are characteristically under the control of commercial manufacturers and are generally not of sufficient importance in the general material end use to warrant the level of quality control necessary for high yield in the heat exchanger fabrication process. The particular raw materials of interest are the copper wire screen and the epoxy plastic laminate.

The solution to these materials problems is correctable by writing a materials specification to specify the acceptable range of values for the various materials parameters found in the course of this program to be particularly critical. To purchase the raw material to such specification is expected to result in both long lead-time and high cost compared to those lead times and costs experienced in purchasing the normally available materials.

In the course of the program, the heat exchanger assembly was designed and documented. The design incorporates many features which reflect the experiences in correcting problems found in prior heat exchanger assemblies. The primary design feature is the incorporation of the intersection manifolding into the exchanger itself. This is done to preclude the leakage problems which were experienced in designs with the manifolds coupled externally to the exchanger assembly.

The new manifolding technique was applied to a heat exchanger of similar design to the unit described in this report. During the testing of this assembly, the heat exchanger performance data indicated that leaks had developed at the manifolds. The problem which developed is attributable to a new type of adhesive which was used to join the aluminum manifold to the epoxy heat exchanger sections. The adhesive which had been proven successful in the past for cryogenic applications had, at that time, been removed from the market as a result of its being a suspected carcinogen.

2.0 HEAT EXCHANGER THERMODYNAMIC DESIGN

2.1 General Performance Analysis

The performance of the exchanger is analyzed using the basic NTU and pressure drop relations. Given a desired effectiveness, the required NTU is $e/(1 - e)$. The basic overall design NTU (without longitudinal conduction) is obtained from

$$\frac{1}{NTU} = \frac{1}{NTU_h} + \frac{1}{KA_s/L_{kw}C} + \frac{1}{NTU_c}$$

and the individual package NTUs are equal to

$$\frac{1}{NTU_h} = \frac{1}{NTU_c}$$

The Colburn modulus

$$j = (VC_p/N_{Pr})^{2/3}$$

is found from Reference 1.

The hydraulic radius of wire mesh is given by

$$r_h = \frac{d_w}{4} \approx \frac{e}{1 - e}$$

Special care must be taken in the evaluation of the conduction parameters. Because the wires are not all oriented perpendicular to the walls, the effective conduction length varies randomly. On the average, the wires will be at a 45° angle, and the conduction length L_c can be considered as

$$L_c/\cos 45^\circ = 1.414 L'$$

where L' is the thickness of the wall or one-half of the gas passage width, depending on the computation. Also, the effective conduction area through the wall consists almost totally of the wire cross section only (because of the low conductivity of the plastic); this area is equal to the product of the wall side area and the quantity $(1 - \epsilon)$.

The pressure drop is given by the Fanning equation as

$$\Delta P = \frac{f}{2} \frac{G^2}{\rho} \frac{L}{r_h}$$

where f is again taken from Reference 1.

The effects of longitudinal conduction for the complete exchanger (including gas passages) are then calculated as described in the next section. Finally, a safety factor of about 10% (this varies with the required effectiveness) is added to compensate for any remaining flow unbalance.

The procedure for arriving at an acceptable design is obviously iterative. It can be shortened significantly by using the design equation

$$\frac{\Delta P}{NTU_1} = \frac{1}{2} \frac{f}{j} \frac{G^2}{\rho} N_{Pr}^{2/3}$$

to arrive at a starting point for required flow area. This equation is applied to both gas flows separately and the NTU_1 used must be at least double the required overall value, with factors added for the various conduction parameters. A value of 2.5 NTU_1 is normal. The ratio f/j can be assumed to be constant with a value of ten for the Reynolds numbers of interest.

2.2 Longitudinal Conduction

The method for analyzing longitudinal conduction effects⁽¹⁾ uses the factor

$$\lambda = \frac{(k/L)A_k}{C_{\min}} = \frac{\Delta e}{e}$$

with the following k values in Btu/(hr-ft² - °F/ft):

$$k_{\text{copper}} = 226, \quad k_{\text{plastic}} = 0.075, \quad k_{\text{plastic-copper bed}} = 0.255$$

The value for the conductivity of the plastic-copper ($k_{\text{plastic-copper bed}}$) was obtained from data presented by McAdams⁽²⁾. The data, in graphical form (Fig. 2-1), give the thermal conductivity of a packed bed of spherical particles containing stagnant interstitial fluid for various void volume fractions. (The data have been extrapolated to include standard wire mesh screen void volumes.) The bed conductivity k_g is correlated by plotting k_g/k_g , the ratio of bed conductivity to stagnant fluid conductivity vs. k_s/k_g , the ratio of matrix material conductivity to stagnant fluid conductivity. This result is applied to the subject case by considering the plastic to be the low-conductivity interstitial fluid, i.e., $k_g = k_{\text{plastic}}$.

2.3 Channel Flow Unbalance and Its Reduction

The deleterious effects of unbalanced channel flow on high-efficiency counterflow heat exchangers has long been known, and was analyzed in a paper by Fleming⁽³⁾. This analysis computed the degradation in exchanger NTU as a function of the magnitude and extent of the unbalance. The results showed that, for a 99% design effectiveness exchanger, if the flow in 20% of the channels varies by $\pm 10\%$ from nominal, the actual exchanger effectiveness is reduced to about 98%. This is equivalent to a 50% reduction in NTU. This magnitude of flow variation is not at all uncommon, despite close attention to tolerances and headering. For example, in a tubular channel with laminar flow, the mass flow is proportional to the fourth power of the hydraulic diameter, and a $\pm 3\%$ size variation will produce a 13% change in flow.

This exchanger utilizes a patented technique which has the effect of forcing the individual channel flows into a more or less balanced state, regardless of passage size variations and nonuniform manifolding. This technique was described in detail

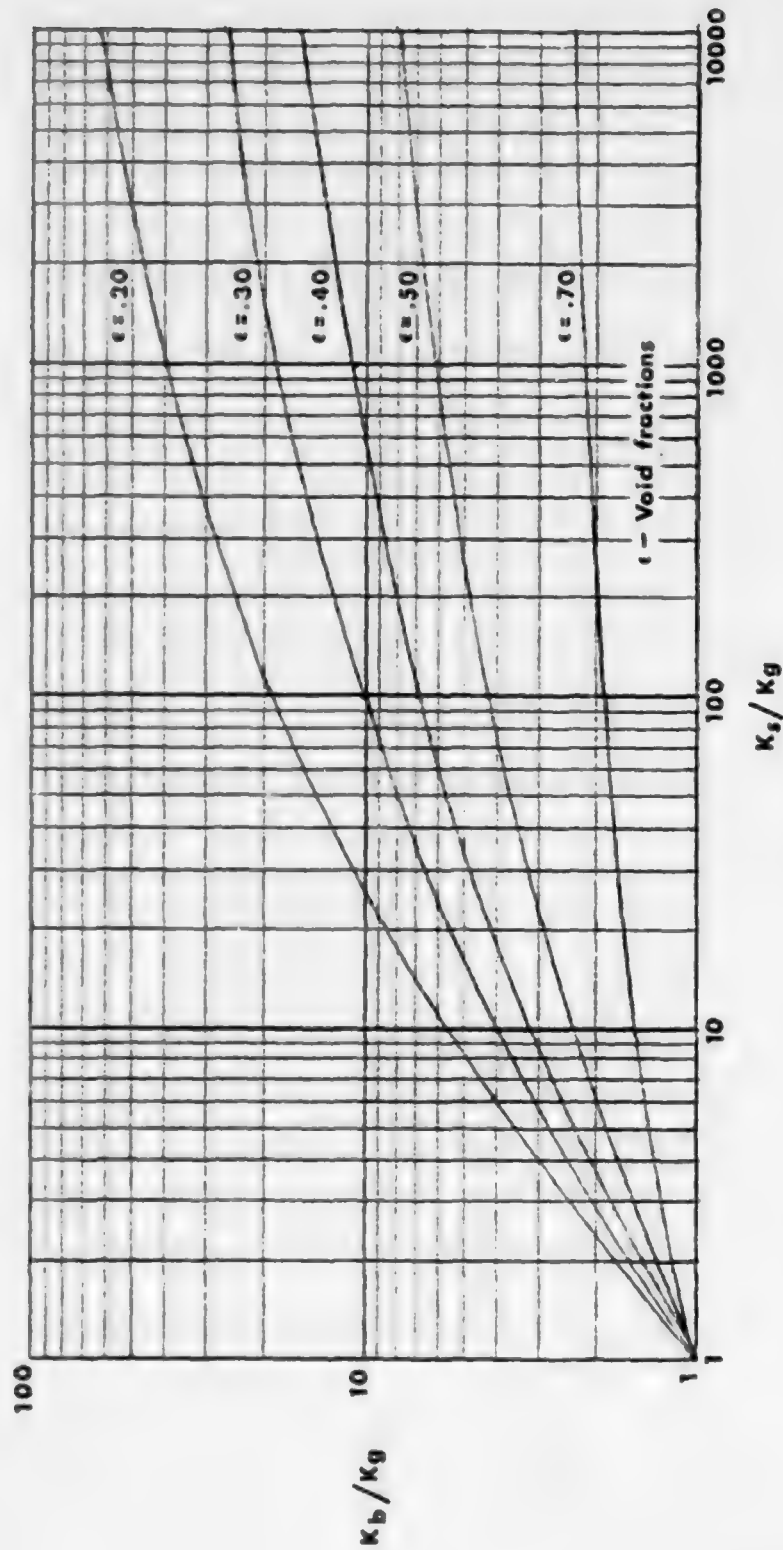


Figure 2-1 - Conductivity of a Packed Bed (Ref. 2)

by Cowans⁽⁴⁾ and will be treated in only a general manner here. Basically, it can be considered as a quasi-negative feedback control system, as shown in the block diagram of Fig. 2-2. In any flow channel, the pressure difference between inlet and outlet causes a mass flow in proportion to the pressure drop and is governed by geometrical and fluid property factors. For laminar flow (the normal condition), this can be written as

$$\dot{m} = \left(\frac{2r_h^2 A_f}{L} \right) \left(\frac{\rho}{\mu} \right) \Delta P = R_l \Delta P$$

In a counterflow exchanger, if the mass flow of an individual channel changes with respect to the flow in adjacent channels, the temperature gradient in this channel also changes due to energy conservation effects. The mass flow is dependent on the physical properties of density and viscosity as well as channel geometry (as noted in the above equation) and these are in turn proportional to $1/T$ and $T^{0.7}$, respectively. Therefore we have

$$\dot{m} \sim \Delta P / T^{1.7}$$

and an increase in temperature tends to decrease the mass flow. This effect, however, does not provide for stabilization in a normal exchanger, because a temperature rise in the high flow channel creates an even greater rise in temperature in the adjacent channels, restricting their flow also.

This temperature-pressure drop relation can be used to stabilize the flows by making the effect of the temperature change (due to mass flow change) greater in the hot flow passages than in the cold ones. This is accomplished by taking advantage of the fact that the greatest deviation from the design temperature gradient, due to unequal flows, occurs at the longitudinal center of the flow passage. If a small restriction is placed at the midpoint of the hot flow passages, such that it is the dominant factor in governing the mass flow, then initial changes in mass flow will create a proportionately large change in restriction. However,

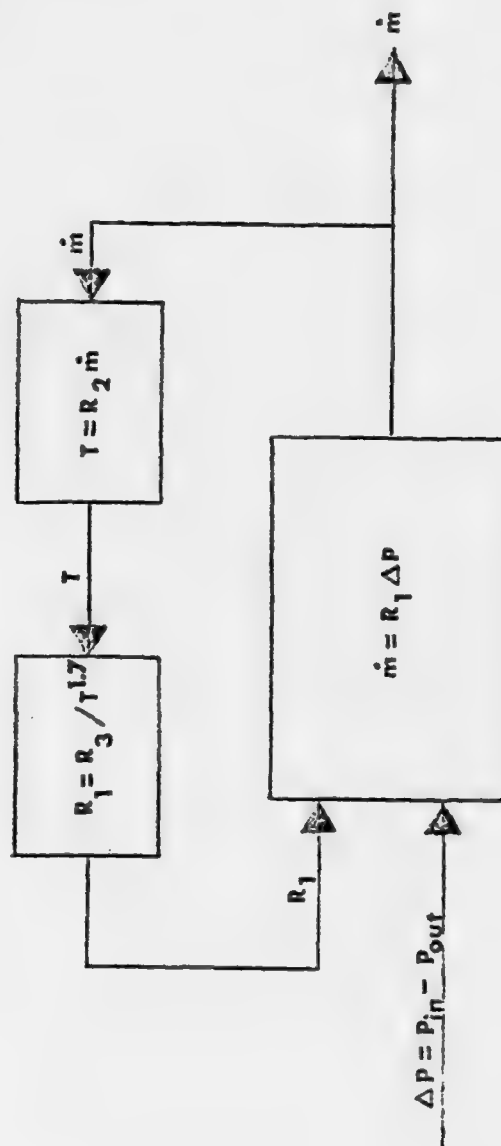


Figure 2-2 - Unbalanced Flow Control Schematic

the adjacent cold flows will not experience the same proportionate change in restriction even though their fluid temperature does rise from the increased heat transfer. Therefore, the net effect is to bring the hot mass flow rate back to nearly the level of the cold flows. The converse is, of course, true if the hot flow is less than the adjacent cold flows.

Incorporation of this compensation feature was the necessary step in obtaining true 99+% effectiveness in a compact exchanger. It was first proven in a corrugated "100% primary surface" exchanger with a design NTU of 200. The best efforts at maintaining close passage tolerances and perfect manifolding had produced a maximum actual NTU of only 33. After incorporating the flow compensation geometry, the actual NTU improved to 167, or a fivefold gain. This technique can, of course, be applied to any form of counterflow exchanger. It is particularly adaptable to the screen-plastic type, since only a change in the flow passage cutout for the middle section lamina is required. This is illustrated for the subject exchanger in Fig. 2-3.

2.4 Design Analysis Results

The results of the design analysis performed per the procedure outlined in the preceding sections are presented in Table I. The specification requirements are also shown for comparison, and the specified system flow diagram is presented in Fig. 2-4. Note that the design NTU values are sufficient for an exchanger of 99% effectiveness while only 98.5% is required. However, the pressure drops of the first three sections (particularly in the low pressure side) are excessive. This is a result of limitations on usable screen mesh and section sizes with the current fabrication techniques.

The longitudinal conduction effects have not been included in the above, as they are relatively insignificant. The most critical section is the coldest. In this section, $C = 54 \text{ watts/}^{\circ}\text{K}$, $k = 22.5 \times 10^{-3} \text{ watts/cm } ^{\circ}\text{K}$, $A = 21.75 \text{ cm}^2$, and $l = 13.3 \text{ cm}$. Then

$$\frac{\Delta e}{e} = .675 \times 10^{-3}$$

and the loss in effectiveness is .067% of the total e of .99.

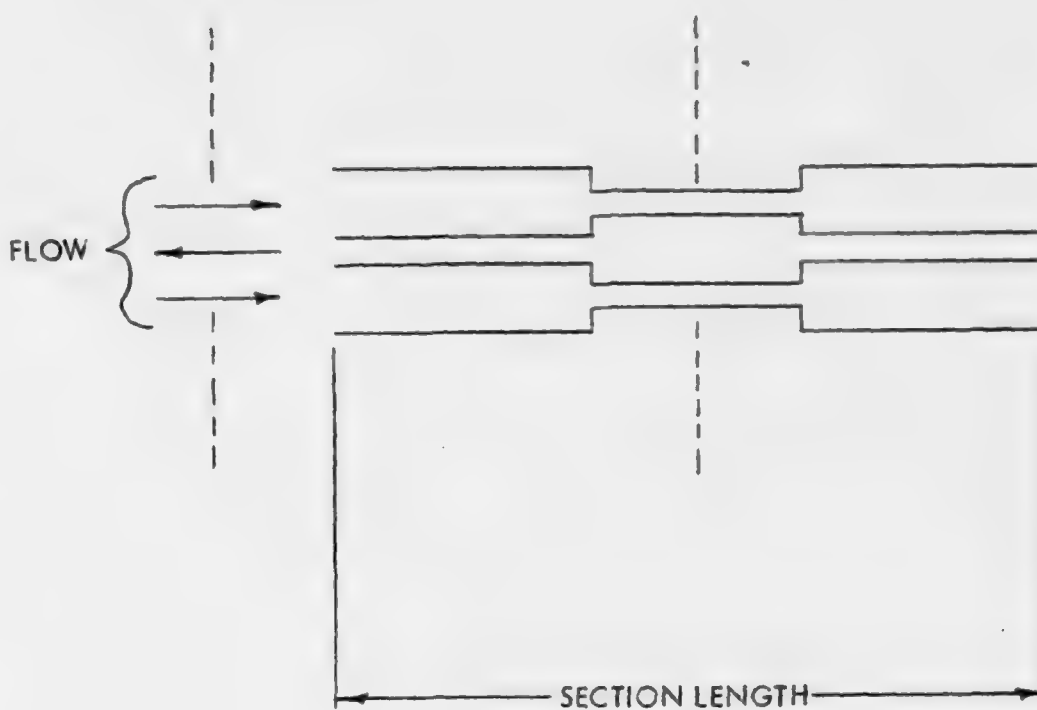


Figure 2-3 - Illustration of How Flow Compensation Technique is Incorporated Into Counter-Flow Exchanger

TABLE I

Design Analysis Results

.0075 Diameter 60 Mesh

Section	Length (in.)	Specifications			
		λT	ΔP_h (ATM)	ΔP_c (ATM)	λT
1	5.73	93.5	.077	.128	65.7
2	1.00	12.7	.0078	.00208	7.44
3	7.16	100.0	.065	.102	65.7
4	1.00	15.42	.000313	.00171	4.37
5	5.24	99.6	.00715	.0103	65.7
TOTAL	20.13		.1573	.2441	.22

Estimated Input Power = 70.8 KW
 $\dot{m}_{Total} = 27.9 \text{ g/sec.}$
 Pressure Ratio = 4.44

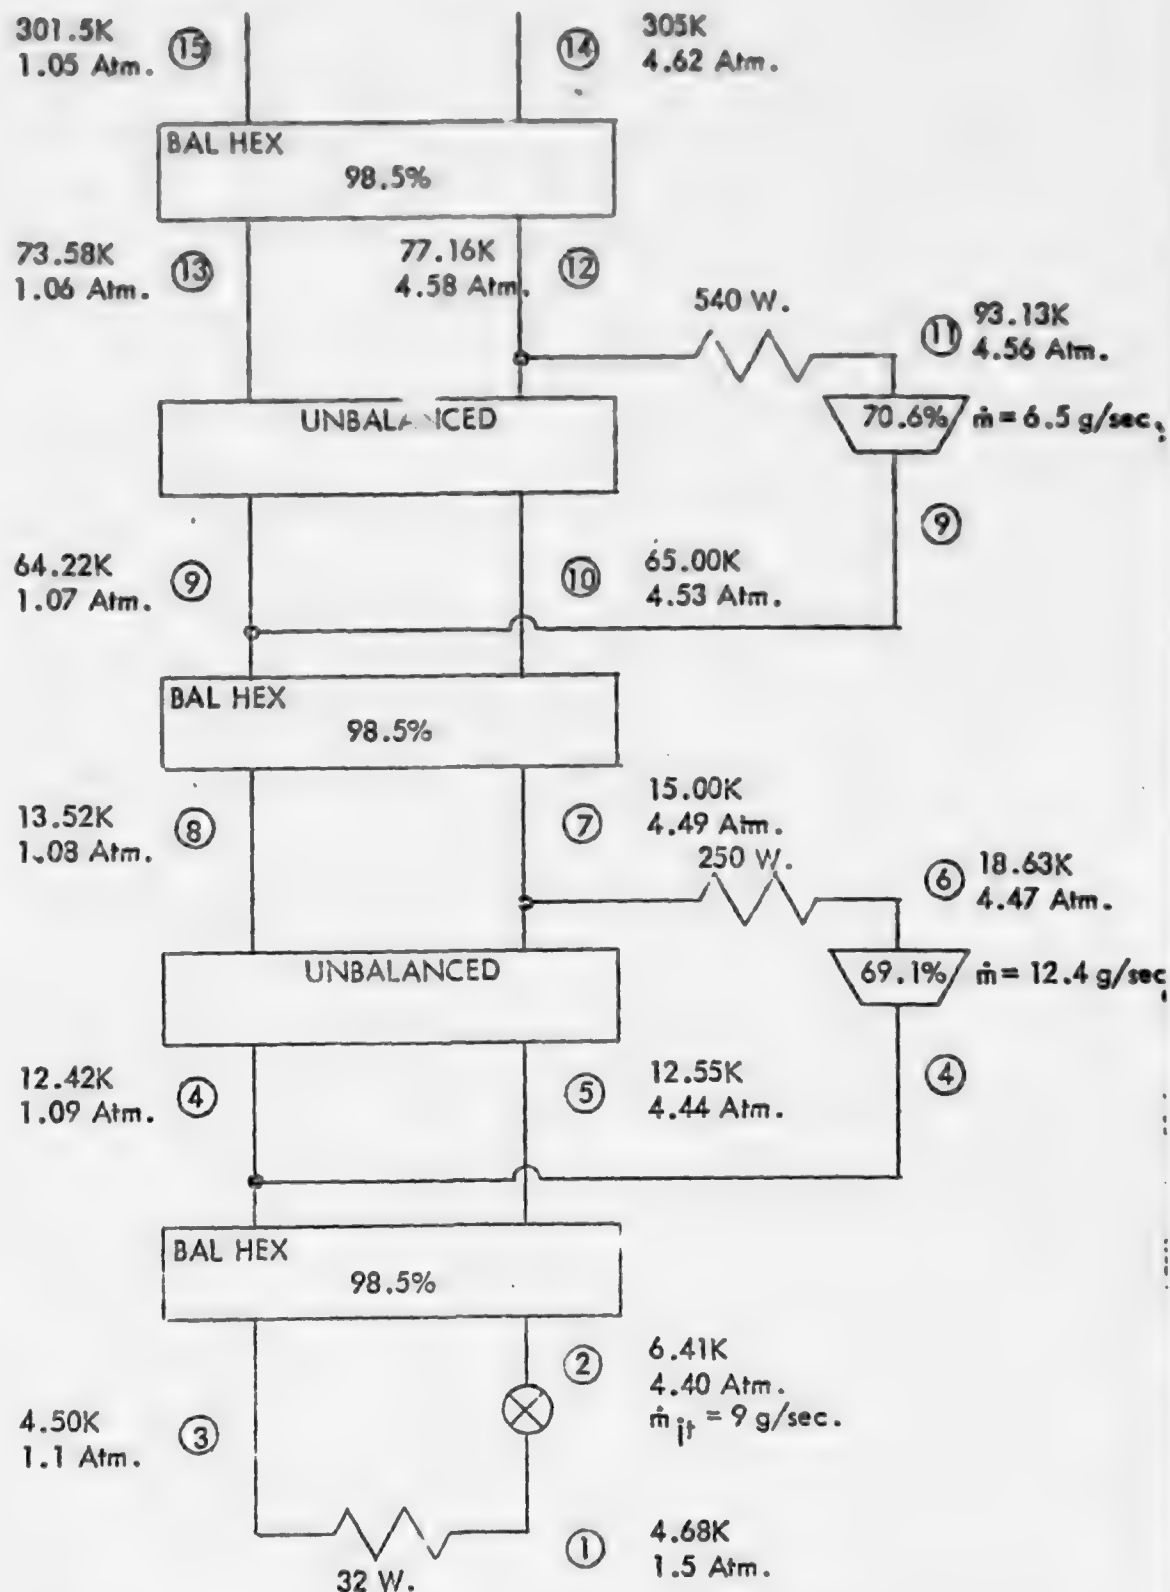


Figure 2-4 - Heat Exchanger Thermodynamic State Schematic


3.0 HEAT EXCHANGER PHYSICAL DESIGN

3.1 General Configuration

The heat exchanger consists of a set of three balanced-flow sections and two unbalanced-flow sections. This heat exchanger is designed for use in a Claude cycle refrigeration system. Due to limitations in the tooling, the cross-sectional diameter and flow passage dimensions of the modules are fixed. To allow the high design flow rate of almost 30 g/sec within allowable pressure drops, the first balanced flow section is designed to consist of two exchanger sections connected in parallel. The remaining sections of the exchanger are manifolded to the parallel sections and connected in series. The fact that the first balanced flow section contains two sections connected in parallel makes the overall physical design of this heat exchanger somewhat complex and requires definite refinements in manifold design. Figure 3-1 shows a schematic of this system.

To eliminate the manifold leakage problems which plagued prior exchanger systems, a new manifold configuration was designed. In contrast to the manifold design for the prior systems, the manifolds in the new system are an integral part of the heat exchanger rather than an exterior addition. Each manifold is part of the system structurally as well as functionally. All are designed in such a manner that the thermal contraction differences between the aluminum manifolds (which are sandwiched between the separate heat exchanger modules) and the plastic will not cause breakage at the joints.

This heat exchanger is designed to be encapsulated in a very close-fitting outer shell for the purpose of maintaining a vacuum-tight system. This shell is configured from 321 stainless steel sheet to provide both minimum weight and longitudinal conduction losses. The shell is attached only to the top manifold on the warm end of the heat exchanger. Holes are cut in the can to provide for the supply and return port flanges, which emerge from the manifold and connect to the cryogenic system turbines and other auxiliaries. Special lateral movement bellows have been designed not only to provide for longitudinal movement of the heat exchanger body with respect to the outer shell, but also to retain any leaking helium within the shell. (The longitudinal movement can be greater than 0.30 in. at the cold end of the exchanger.) Each port flange has a bellows with one end welded

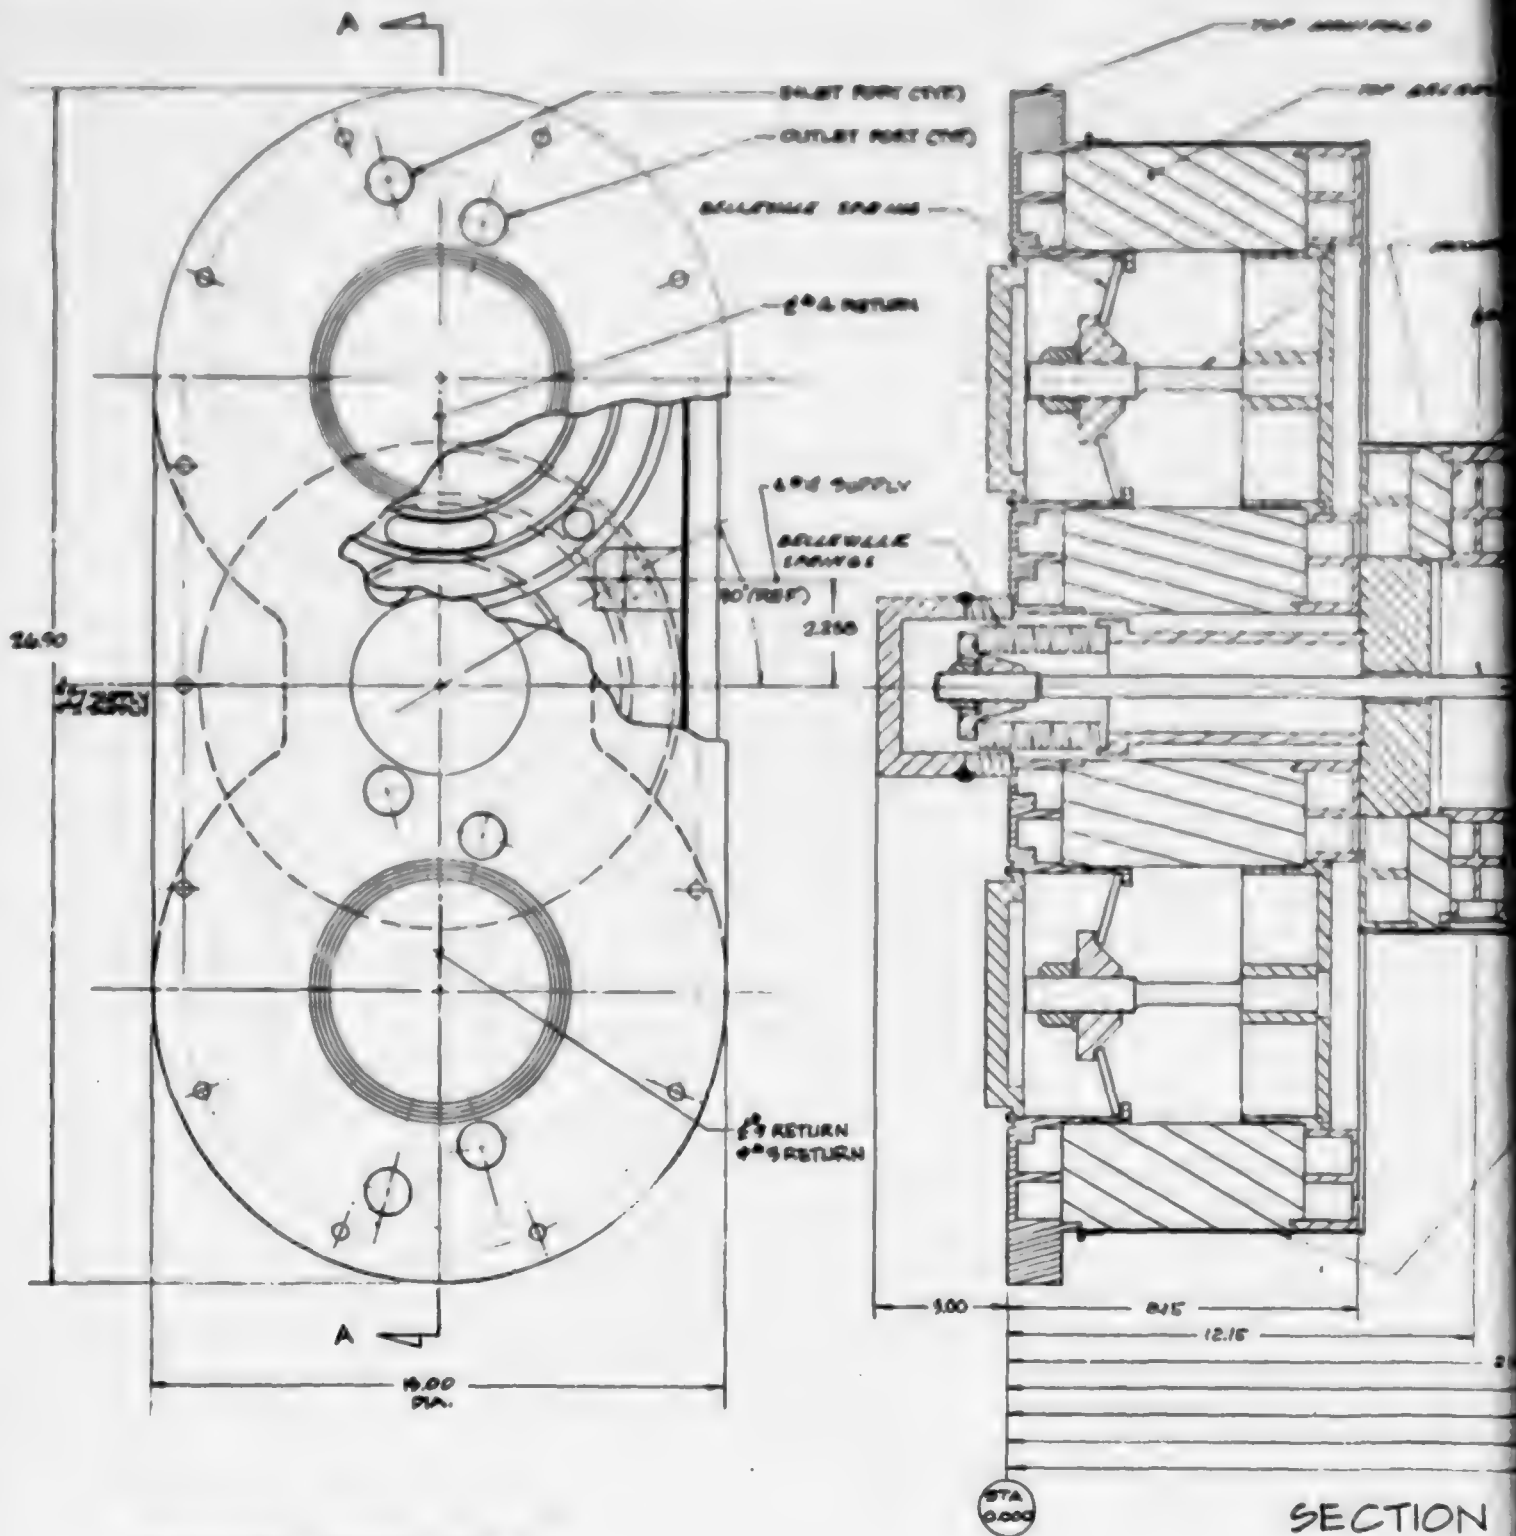

ESTIMATED WEIGHT: 390 LBS.

Preceding page blank

Fig 2

ARRANGED FROM SECTION

REVISIONS			
REV	NO	DESCRIPTION	DATE APPROVED
A		CHANGED COILS TO OVER FOR TOP CHANNEL AND CHANGED SIZE OF COILS	10/10/73 RAB
B		CHANGED PORT CENTERING LOCATIONS AND COILS	10/10/73 RAB
C		REVISED LAYOUT FOR COIL DIA 1.5 TO 1.625 COILS	10/10/73 RAB


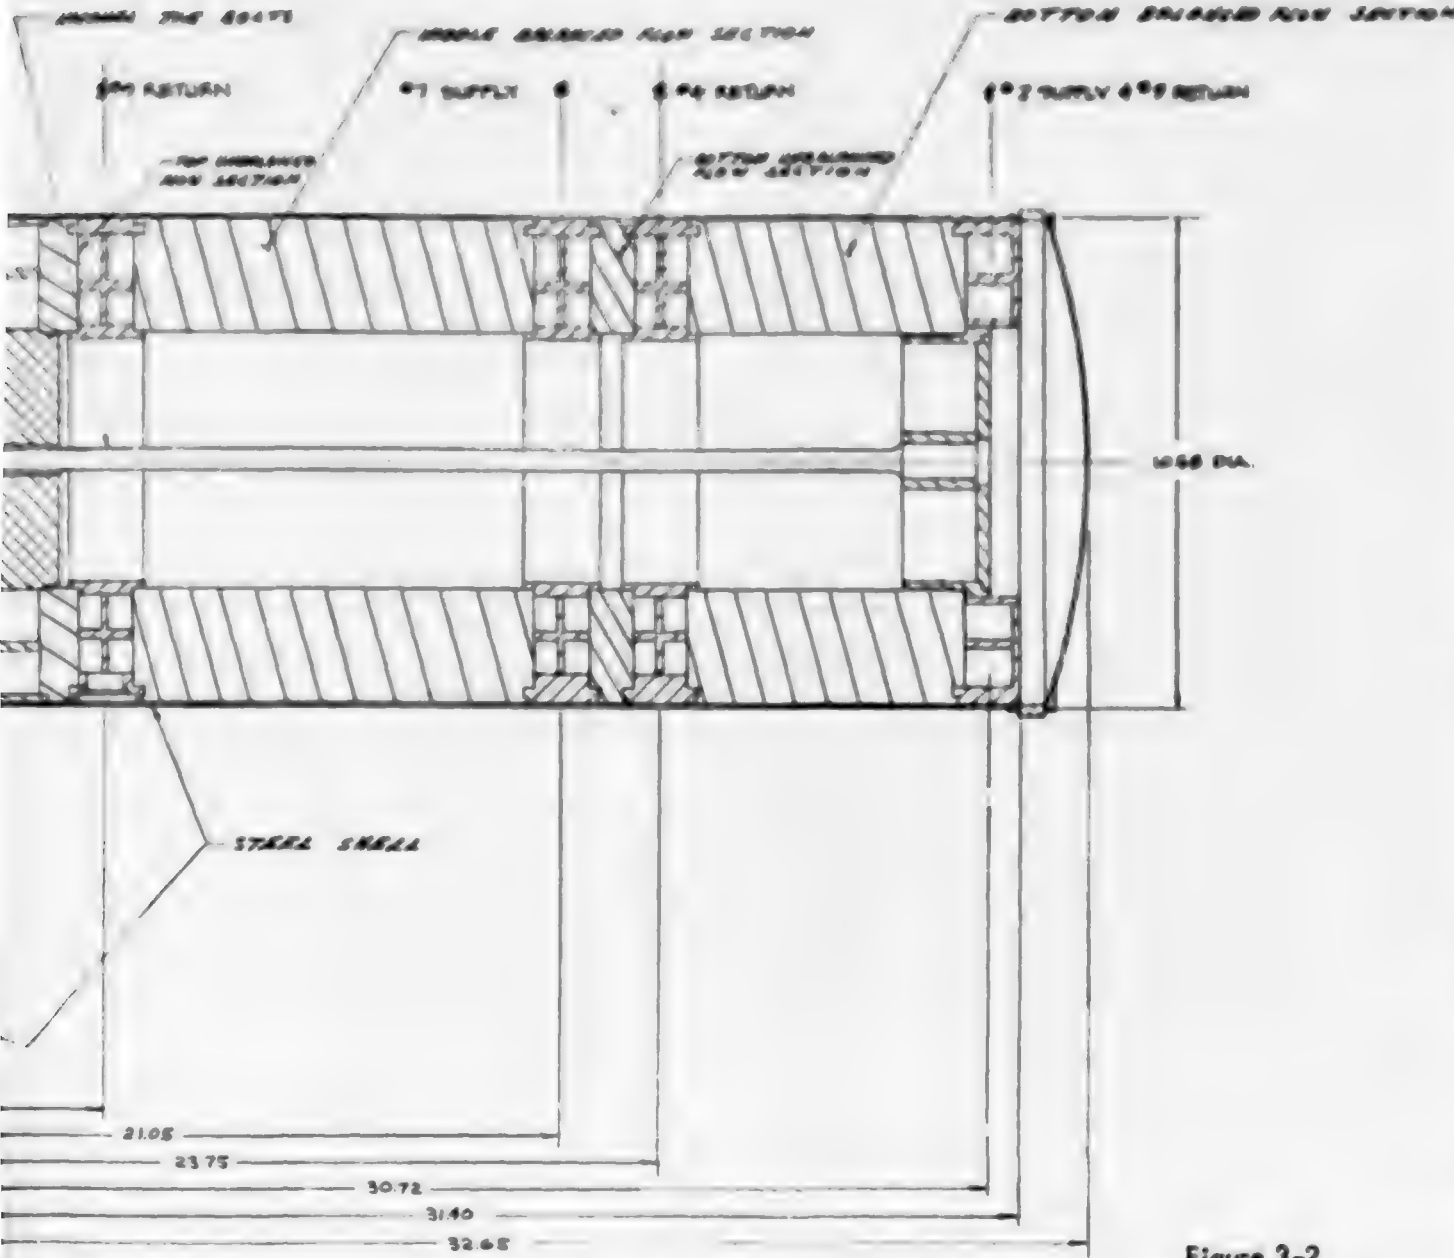


Figure 3-2


SECTION A-A

QTY REQD	QTY REQD	ITEM NO.	IDENTIFYING NO.	DESCRIPTION	MATERIAL	SPECIFICATION
LIST OF MATERIAL						
UNLESS OTHERWISE SPECIFIED			CONTR NO. CP-2020			
DRILL TOLERANCES			DRAWN M. BLKAN			
.000 TO .125 + .002 / .001			CHECK G. TAYLOR			
.125 TO .250 + .003 / .001			ELEC.			
.250 TO 1/2 + .004 / .001			MECH.			
3/8 TO 3/4 + .005 / .001			DESIGN			
MACH. FINISH			APPR.			
OR BETTER			APPROVED			
BREAK SHARP EDGES AND REMOVE ALL BURRS			10/10/73			
CHIPS APPLY AFTER FINISH			APPROVED			
DIMENSIONS ARE PER UNAS 7143						
IDENTIFY PER MIL-STD-130						
DO NOT SCALE DRAWING						
PART NO.			KINETICS INC.			
NO. REQD PER UNIT			TAYLOR, CALIFORNIA 91358			
NEXT ASSY			LAYOUT - HEAT EXCHANGER SYSTEM			
USED ON			SIZE CODE IDENT NO.			
FINISH			D 51210 L3900			
SPEC.			SCALE 1/8			
DIMENSIONS ARE IN INCHES			WEIGHT			
TOL. .001 ± .001			SHEET 1 OF 2			
FRACT. ± 1/32						
ANG. ± 0° 30'						

L3900

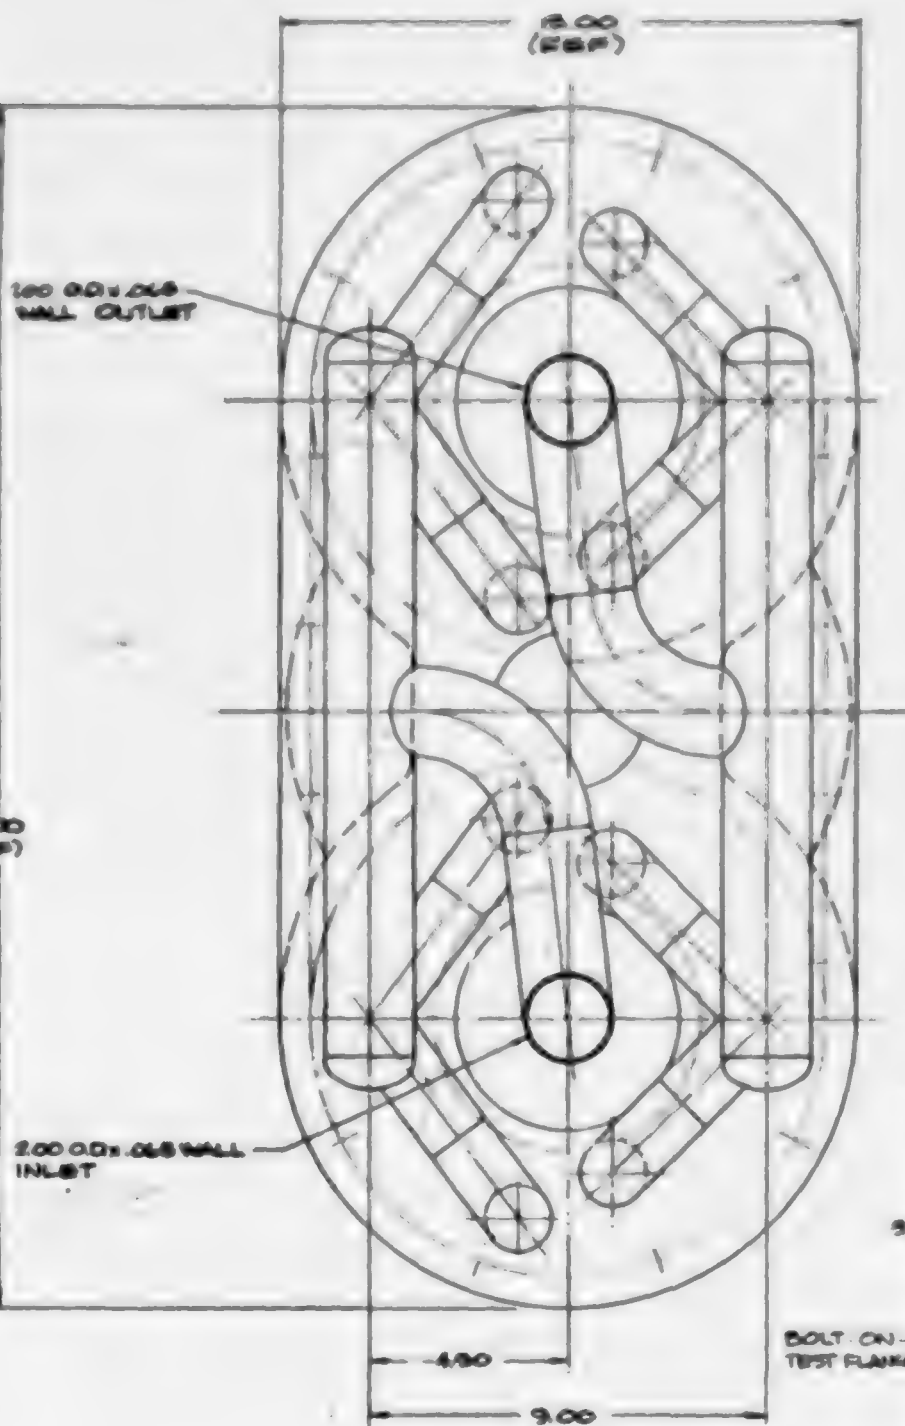

ESTIMATED WEIGHT: 990 LBS

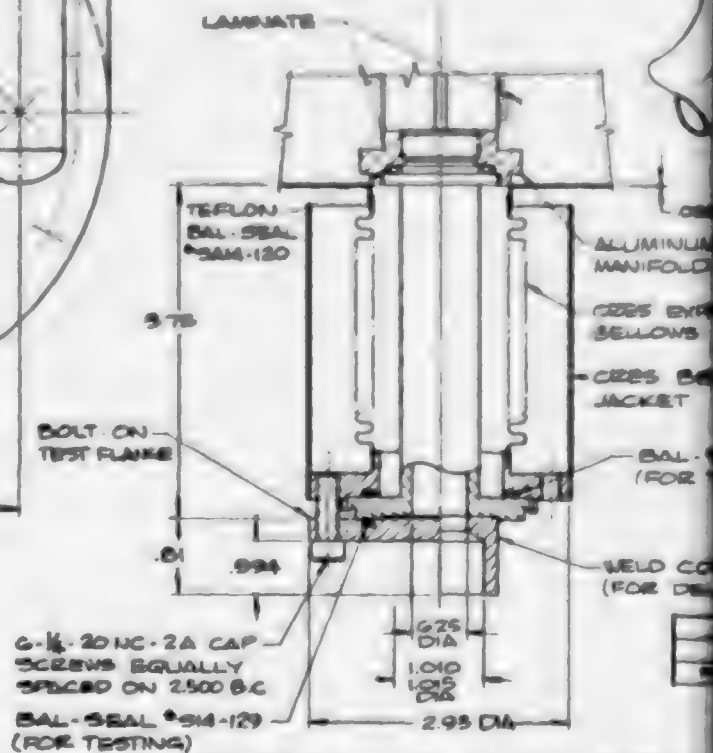

6-1/8-20 NC-2A CAP
SCREWS EQUALLY
SPACED ON 2500 B.C
BAL. SEAL *SAM-120
(FOR TESTING)

TYPICAL FLANGE DETAIL
SCALE: 1/1

REVISIONS				
REV	NO	DESCRIPTION	DATE	APPROVED
A		REVISED INLET AND OUTLET MANIFOLD	10-1-73	A.A.B.
B		REVISED TYPICAL FLANGE DETAIL	10-1-73	A.A.B.
C		REVISED 1/2" DIA	10-1-73	A.A.B.

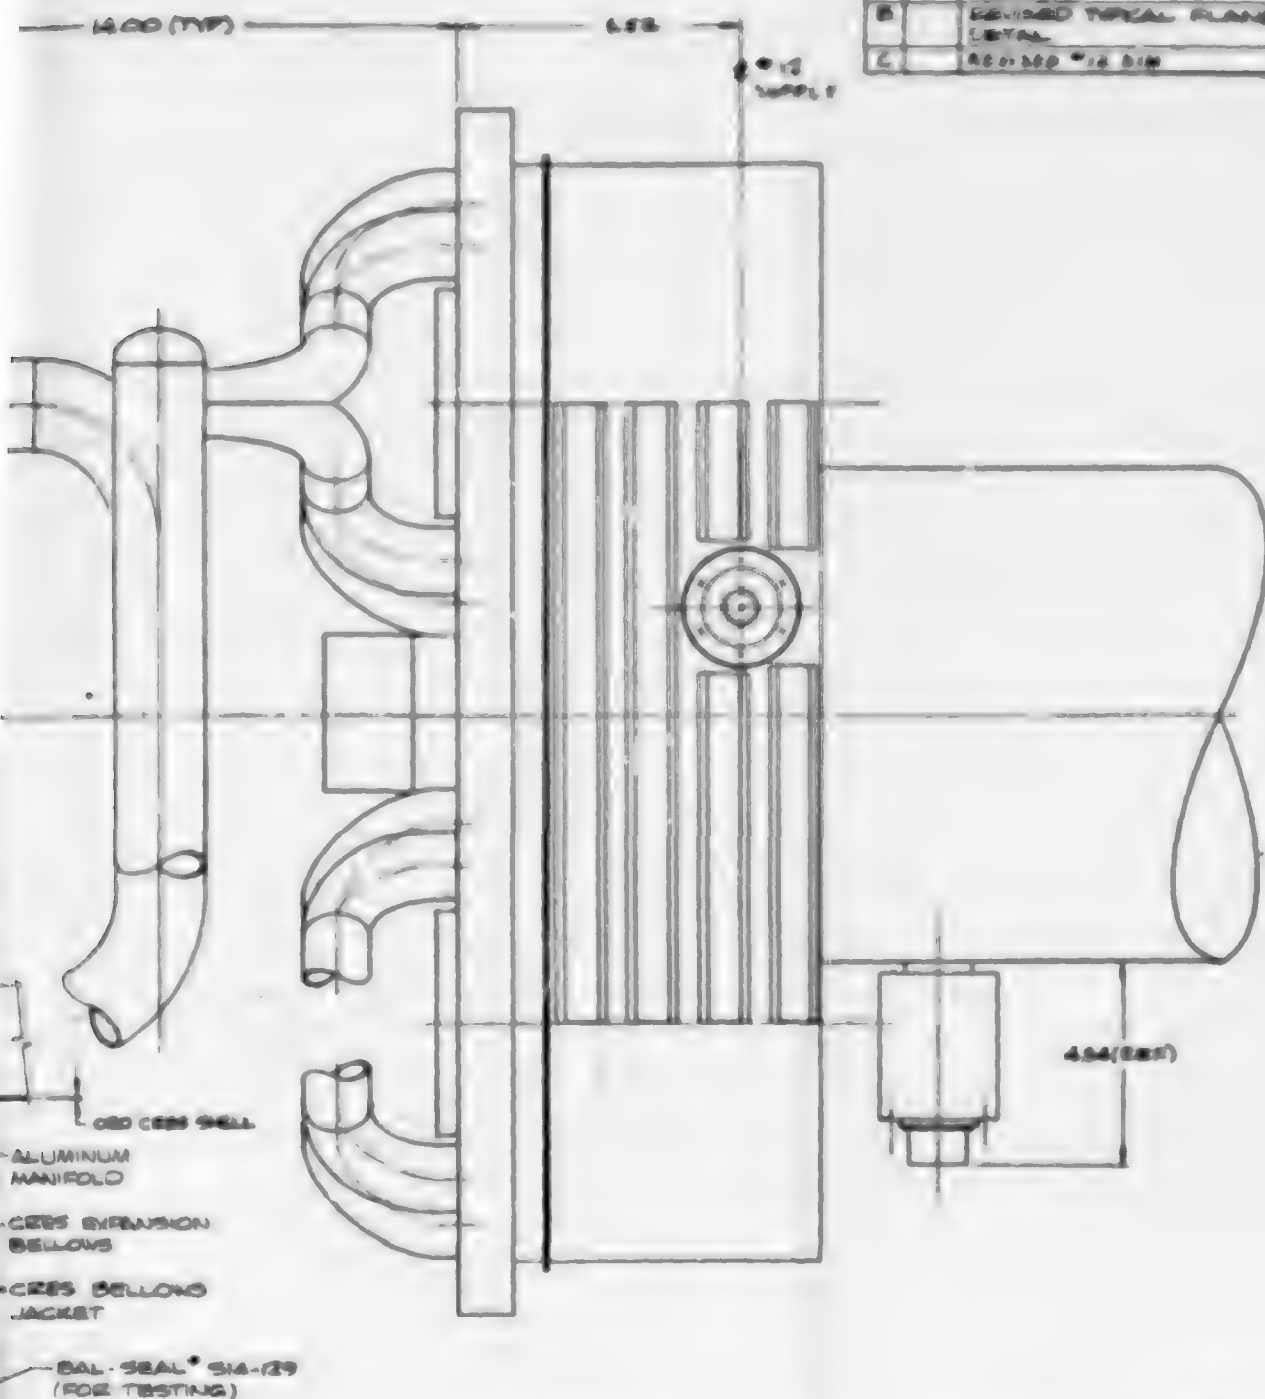


Figure 3-3

QTY	QTY	ITEM	IDENTIFYING NO.	DESCRIPTION	MATERIAL	SPECIFICATION
REQD	REQD	NO.				
LIST OF MATERIAL						
RPX-13 PART NO. NO. REQD PER UNIT NEXT ASSY USED BY FINISH SPEC.			UNLESS OTHERWISE SPECIFIED DRILL TOLERANCES .001 TO .004 ± .001 .004 TO .008 ± .001 .008 TO .012 ± .001 .012 TO .016 ± .001 .016 TO .020 ± .001 .020 TO .024 ± .001 .024 TO .028 ± .001 .028 TO .032 ± .001 .032 TO .036 ± .001 .036 TO .040 ± .001 .040 TO .044 ± .001 .044 TO .048 ± .001 .048 TO .052 ± .001 .052 TO .056 ± .001 .056 TO .060 ± .001 .060 TO .064 ± .001 .064 TO .068 ± .001 .068 TO .072 ± .001 .072 TO .076 ± .001 .076 TO .080 ± .001 .080 TO .084 ± .001 .084 TO .088 ± .001 .088 TO .092 ± .001 .092 TO .096 ± .001 .096 TO .100 ± .001 .100 TO .104 ± .001 .104 TO .108 ± .001 .108 TO .112 ± .001 .112 TO .116 ± .001 .116 TO .120 ± .001 .120 TO .124 ± .001 .124 TO .128 ± .001 .128 TO .132 ± .001 .132 TO .136 ± .001 .136 TO .140 ± .001 .140 TO .144 ± .001 .144 TO .148 ± .001 .148 TO .152 ± .001 .152 TO .156 ± .001 .156 TO .160 ± .001 .160 TO .164 ± .001 .164 TO .168 ± .001 .168 TO .172 ± .001 .172 TO .176 ± .001 .176 TO .180 ± .001 .180 TO .184 ± .001 .184 TO .188 ± .001 .188 TO .192 ± .001 .192 TO .196 ± .001 .196 TO .200 ± .001 .200 TO .204 ± .001 .204 TO .208 ± .001 .208 TO .212 ± .001 .212 TO .216 ± .001 .216 TO .220 ± .001 .220 TO .224 ± .001 .224 TO .228 ± .001 .228 TO .232 ± .001 .232 TO .236 ± .001 .236 TO .240 ± .001 .240 TO .244 ± .001 .244 TO .248 ± .001 .248 TO .252 ± .001 .252 TO .256 ± .001 .256 TO .260 ± .001 .260 TO .264 ± .001 .264 TO .268 ± .001 .268 TO .272 ± .001 .272 TO .276 ± .001 .276 TO .280 ± .001 .280 TO .284 ± .001 .284 TO .288 ± .001 .288 TO .292 ± .001 .292 TO .296 ± .001 .296 TO .300 ± .001 .300 TO .304 ± .001 .304 TO .308 ± .001 .308 TO .312 ± .001 .312 TO .316 ± .001 .316 TO .320 ± .001 .320 TO .324 ± .001 .324 TO .328 ± .001 .328 TO .332 ± .001 .332 TO .336 ± .001 .336 TO .340 ± .001 .340 TO .344 ± .001 .344 TO .348 ± .001 .348 TO .352 ± .001 .352 TO .356 ± .001 .356 TO .360 ± .001 .360 TO .364 ± .001 .364 TO .368 ± .001 .368 TO .372 ± .001 .372 TO .376 ± .001 .376 TO .380 ± .001 .380 TO .384 ± .001 .384 TO .388 ± .001 .388 TO .392 ± .001 .392 TO .396 ± .001 .396 TO .400 ± .001 .400 TO .404 ± .001 .404 TO .408 ± .001 .408 TO .412 ± .001 .412 TO .416 ± .001 .416 TO .420 ± .001 .420 TO .424 ± .001 .424 TO .428 ± .001 .428 TO .432 ± .001 .432 TO .436 ± .001 .436 TO .440 ± .001 .440 TO .444 ± .001 .444 TO .448 ± .001 .448 TO .452 ± .001 .452 TO .456 ± .001 .456 TO .460 ± .001 .460 TO .464 ± .001 .464 TO .468 ± .001 .468 TO .472 ± .001 .472 TO .476 ± .001 .476 TO .480 ± .001 .480 TO .484 ± .001 .484 TO .488 ± .001 .488 TO .492 ± .001 .492 TO .496 ± .001 .496 TO .500 ± .001 .500 TO .504 ± .001 .504 TO .508 ± .001 .508 TO .512 ± .001 .512 TO .516 ± .001 .516 TO .520 ± .001 .520 TO .524 ± .001 .524 TO .528 ± .001 .528 TO .532 ± .001 .532 TO .536 ± .001 .536 TO .540 ± .001 .540 TO .544 ± .001 .544 TO .548 ± .001 .548 TO .552 ± .001 .552 TO .556 ± .001 .556 TO .560 ± .001 .560 TO .564 ± .001 .564 TO .568 ± .001 .568 TO .572 ± .001 .572 TO .576 ± .001 .576 TO .580 ± .001 .580 TO .584 ± .001 .584 TO .588 ± .001 .588 TO .592 ± .001 .592 TO .596 ± .001 .596 TO .600 ± .001 .600 TO .604 ± .001 .604 TO .608 ± .001 .608 TO .612 ± .001 .612 TO .616 ± .001 .616 TO .620 ± .001 .620 TO .624 ± .001 .624 TO .628 ± .001 .628 TO .632 ± .001 .632 TO .636 ± .001 .636 TO .640 ± .001 .640 TO .644 ± .001 .644 TO .648 ± .001 .648 TO .652 ± .001 .652 TO .656 ± .001 .656 TO .660 ± .001 .660 TO .664 ± .001 .664 TO .668 ± .001 .668 TO .672 ± .001 .672 TO .676 ± .001 .676 TO .680 ± .001 .680 TO .684 ± .001 .684 TO .688 ± .001 .688 TO .692 ± .001 .692 TO .696 ± .001 .696 TO .700 ± .001 .700 TO .704 ± .001 .704 TO .708 ± .001 .708 TO .712 ± .001 .712 TO .716 ± .001 .716 TO .720 ± .001 .720 TO .724 ± .001 .724 TO .728 ± .001 .728 TO .732 ± .001 .732 TO .736 ± .001 .736 TO .740 ± .001 .740 TO .744 ± .001 .744 TO .748 ± .001 .748 TO .752 ± .001 .752 TO .756 ± .001 .756 TO .760 ± .001 .760 TO .764 ± .001 .764 TO .768 ± .001 .768 TO .772 ± .001 .772 TO .776 ± .001 .776 TO .780 ± .001 .780 TO .784 ± .001 .784 TO .788 ± .001 .788 TO .792 ± .001 .792 TO .796 ± .001 .796 TO .800 ± .001 .800 TO .804 ± .001 .804 TO .808 ± .001 .808 TO .812 ± .001 .812 TO .816 ± .001 .816 TO .820 ± .001 .820 TO .824 ± .001 .824 TO .828 ± .001 .828 TO .832 ± .001 .832 TO .836 ± .001 .836 TO .840 ± .001 .840 TO .844 ± .001 .844 TO .848 ± .001 .848 TO .852 ± .001 .852 TO .856 ± .001 .856 TO .860 ± .001 .860 TO .864 ± .001 .864 TO .868 ± .001 .868 TO .872 ± .001 .872 TO .876 ± .001 .876 TO .880 ± .001 .880 TO .884 ± .001 .884 TO .888 ± .001 .888 TO .892 ± .001 .892 TO .896 ± .001 .896 TO .900 ± .001 .900 TO .904 ± .001 .904 TO .908 ± .001 .908 TO .912 ± .001 .912 TO .916 ± .001 .916 TO .920 ± .001 .920 TO .924 ± .001 .924 TO .928 ± .001 .928 TO .932 ± .001 .932 TO .936 ± .001 .936 TO .940 ± .001 .940 TO .944 ± .001 .944 TO .948 ± .001 .948 TO .952 ± .001 .952 TO .956 ± .001 .956 TO .960 ± .001 .960 TO .964 ± .001 .964 TO .968 ± .001 .968 TO .972 ± .001 .972 TO .976 ± .001 .976 TO .980 ± .001 .980 TO .984 ± .001 .984 TO .988 ± .001 .988 TO .992 ± .001 .992 TO .996 ± .001 .996 TO 1.000 ± .001 1.000 TO 1.004 ± .001 1.004 TO 1.008 ± .001 1.008 TO 1.012 ± .001 1.012 TO 1.016 ± .001 1.016 TO 1.020 ± .001 1.020 TO 1.024 ± .001 1.024 TO 1.028 ± .001 1.028 TO 1.032 ± .001 1.032 TO 1.036 ± .001 1.036 TO 1.040 ± .001 1.040 TO 1.044 ± .001 1.044 TO 1.048 ± .001 1.048 TO 1.052 ± .001 1.052 TO 1.056 ± .001 1.056 TO 1.060 ± .001 1.060 TO 1.064 ± .001 1.064 TO 1.068 ± .001 1.068 TO 1.072 ± .001 1.072 TO 1.076 ± .001 1.076 TO 1.080 ± .001 1.080 TO 1.084 ± .001 1.084 TO 1.088 ± .001 1.088 TO 1.092 ± .001 1.092 TO 1.096 ± .001 1.096 TO 1.100 ± .001 1.100 TO 1.104 ± .001 1.104 TO 1.108 ± .001 1.108 TO 1.112 ± .001 1.112 TO 1.116 ± .001 1.116 TO 1.120 ± .001 1.120 TO 1.124 ± .001 1.124 TO 1.128 ± .001 1.128 TO 1.132 ± .001 1.132 TO 1.136 ± .001 1.136 TO 1.140 ± .001 1.140 TO 1.144 ± .001 1.144 TO 1.148 ± .001 1.148 TO 1.152 ± .001 1.152 TO 1.156 ± .001 1.156 TO 1.160 ± .001 1.160 TO 1.164 ± .001 1.164 TO 1.168 ± .001 1.168 TO 1.172 ± .001 1.172 TO 1.176 ± .001 1.176 TO 1.180 ± .001 1.180 TO 1.184 ± .001 1.184 TO 1.188 ± .001 1.188 TO 1.192 ± .001 1.192 TO 1.196 ± .001 1.196 TO 1.200 ± .001 1.200 TO 1.204 ± .001 1.204 TO 1.208 ± .001 1.208 TO 1.212 ± .001 1.212 TO 1.216 ± .001 1.216 TO 1.220 ± .001 1.220 TO 1.224 ± .001 1.224 TO 1.228 ± .001 1.228 TO 1.232 ± .001 1.232 TO 1.236 ± .001 1.236 TO 1.240 ± .001 1.240 TO 1.244 ± .001 1.244 TO 1.248 ± .001 1.248 TO 1.252 ± .001 1.252 TO 1.256 ± .001 1.256 TO 1.260 ± .001 1.260 TO 1.264 ± .001 1.264 TO 1.268 ± .001 1.268 TO 1.272 ± .001 1.272 TO 1.276 ± .001 1.276 TO 1.280 ± .001 1.280 TO 1.284 ± .001 1.284 TO 1.288 ± .001 1.288 TO 1.292 ± .001 1.292 TO 1.296 ± .001 1.296 TO 1.300 ± .001 1.300 TO 1.304 ± .001 1.304 TO 1.308 ± .001 1.308 TO 1.312 ± .001 1.312 TO 1.316 ± .001 1.316 TO 1.320 ± .001 1.320 TO 1.324 ± .001 1.324 TO 1.328 ± .001 1.328 TO 1.332 ± .001 1.332 TO 1.336 ± .001 1.336 TO 1.340 ± .001 1.340 TO 1.344 ± .001 1.344 TO 1.348 ± .001 1.348 TO 1.352 ± .001 1.352 TO 1.356 ± .001 1.356 TO 1.360 ± .001 1.360 TO 1.364 ± .001 1.364 TO 1.368 ± .001 1.368 TO 1.372 ± .001 1.372 TO 1.376 ± .001 1.376 TO 1.380 ± .001 1.380 TO 1.384 ± .001 1.384 TO 1.388 ± .001 1.388 TO 1.392 ± .001 1.392 TO 1.396 ± .001 1.396 TO 1.400 ± .001 1.400 TO 1.404 ± .001 1.404 TO 1.408 ± .001 1.408 TO 1.412 ± .001 1.412 TO 1.416 ± .001 1.416 TO 1.420 ± .001 1.420 TO 1.424 ± .001 1.424 TO 1.428 ± .001 1.428 TO 1.432 ± .001 1.432 TO 1.436 ± .001 1.436 TO 1.440 ± .001 1.440 TO 1.444 ± .001 1.444 TO 1.448 ± .001 1.448 TO 1.452 ± .001 1.452 TO 1.456 ± .001 1.456 TO 1.460 ± .001 1.460 TO 1.464 ± .001 1.464 TO 1.468 ± .001 1.468 TO 1.472 ± .001 1.472 TO 1.476 ± .001 1.476 TO 1.480 ± .001 1.480 TO 1.484 ± .001 1.484 TO 1.488 ± .001 1.488 TO 1.492 ± .001 1.492 TO 1.496 ± .001 1.496 TO 1.500 ± .001 1.500 TO 1.504 ± .001 1.504 TO 1.508 ± .001 1.508 TO 1.512 ± .001 1.512 TO 1.516 ± .001 1.516 TO 1.520 ± .001 1.520 TO 1.524 ± .001 1.524 TO 1.528 ± .001 1.528 TO 1.532 ± .001 1.532 TO 1.536 ± .001 1.536 TO 1.540 ± .001 1.540 TO 1.544 ± .001 1.544 TO 1.548 ± .001 1.548 TO 1.552 ± .001 1.552 TO 1.556 ± .001 1.556 TO 1.560 ± .001 1.560 TO 1.564 ± .001 1.564 TO 1.568 ± .001 1.568 TO 1.572 ± .001 1.572 TO 1.576 ± .001 1.576 TO 1.580 ± .001 1.580 TO 1.584 ± .001 1.584 TO 1.588 ± .001 1.588 TO 1.592 ± .001 1.592 TO 1.596 ± .001 1.596 TO 1.600 ± .001 1.600 TO 1.604 ± .001 1.604 TO 1.608 ± .001 1.608 TO 1.612 ± .001 1.612 TO 1.616 ± .001 1.616 TO 1.620 ± .001 1.620 TO 1.624 ± .001 1.624 TO 1.628 ± .001 1.628 TO 1.632 ± .001 1.632 TO 1.636 ± .001 1.636 TO 1.640 ± .001 1.640 TO 1.644 ± .001 1.644 TO 1.648 ± .001 1.648 TO 1.652 ± .001 1.652 TO 1.656 ± .001 1.656 TO 1.660 ± .001 1.660 TO 1.664 ± .001 1.664 TO 1.668 ± .001 1.668 TO 1.672 ± .001 1.672 TO 1.676 ± .001 1.676 TO 1.680 ± .001 1.680 TO 1.684 ± .001 1.684 TO 1.688 ± .001 1.688 TO 1.692 ± .001 1.692 TO 1.696 ± .001 1.696 TO 1.700 ± .001 1.700 TO 1.704 ± .001 1.704 TO 1.708 ± .001 1.708 TO 1.712 ± .001 1.712 TO 1.716 ± .001 1.716 TO 1.720 ± .001 1.720 TO 1.724 ± .001 1.724 TO 1.728 ± .001 1.728 TO 1.732 ± .001 1.732 TO 1.736 ± .001 1.736 TO 1.740 ± .001 1.740 TO 1.744 ± .001 1.744 TO 1.748 ± .001 1.748 TO 1.752 ± .001 1.752 TO 1.756 ± .001 1.756 TO 1.760 ± .001 1.760 TO 1.764 ± .001 1.764 TO 1.768 ± .001 1.768 TO 1.772 ± .001 1.772 TO 1.776 ± .001 1.776 TO 1.780 ± .001 1.780 TO 1.784 ± .001 1.784 TO 1.788 ± .001 1.788 TO 1.792 ± .001 1.792 TO 1.796 ± .001 1.796 TO 1.800 ± .001 1.800 TO 1.804 ± .001 1.804 TO 1.808 ± .001 1.808 TO 1.812 ± .001 1.812 TO 1.816 ± .001 1.816 TO 1.820 ± .001 1.820 TO 1.824 ± .001 1.824 TO 1.828 ± .001 1.828 TO 1.832 ± .001 1.832 TO 1.836 ± .001 1.836 TO 1.840 ± .001 1.840 TO 1.844 ± .001 1.844 TO 1.848 ± .001 1.848 TO 1.852 ± .001 1.852 TO 1.856 ± .001 1.856 TO 1.860 ± .001 1.860 TO 1.864 ± .001 1.864 TO 1.868 ± .001 1.868 TO 1.872 ± .001 1.872 TO 1.876 ± .001 1.876 TO 1.880 ± .001 1.880 TO 1.884 ± .001 1.884 TO 1.888 ± .001 1.888 TO 1.892 ± .001 1.892 TO 1.896 ± .001 1.896 TO 1.900 ± .001 1.900 TO 1.904 ± .001 1.904 TO 1.908 ± .001 1.908 TO 1.912 ± .001 1.912 TO 1.916 ± .001 1.916 TO 1.920 ± .001 1.920 TO 1.924 ± .001 1.924 TO 1.928 ± .001 1.928 TO 1.932 ± .001 1.932 TO 1.936 ± .001 1.936 TO 1.940 ± .001 1.940 TO 1.944 ± .001 1.944 TO 1.948 ± .001 1.948 TO 1.952 ± .001 1.952 TO 1.956 ± .001 1.956 TO 1.960 ± .001 1.960 TO 1.964 ± .001 1.964 TO 1.968 ± .001 1.968 TO 1.972 ± .001 1.972 TO 1.976 ± .001 1.976 TO 1.980 ± .001 1.980 TO 1.984 ± .001 1.984 TO 1.988 ± .001 1.988 TO 1.992 ± .001 1.992 TO 1.996 ± .001 1.996 TO 2.000 ± .001 2.000 TO 2.004 ± .001 2.004 TO 2.008 ± .001 2.008 TO 2.012 ± .001 2.012 TO 2.016 ± .001 2.016 TO 2.020 ± .001 2.020 TO 2.024 ± .001 2.024 TO 2.028 ± .001 2.028 TO 2.032 ± .001 2.032 TO 2.036 ± .001 2.036 TO 2.040 ± .001 2.040 TO 2.044 ± .001 2.044 TO 2.048 ± .001 2.048 TO 2.052 ± .001 2.052 TO 2.056 ± .001 2.056 TO 2.060 ± .001 2.060 TO 2.064 ± .001 2.064 TO 2.068 ± .001 2.068 TO 2.072 ± .001 2.072 TO 2.076 ± .001 2.076 TO 2.080 ± .001 2.080 TO 2.084 ± .001 2.084 TO 2.088 ± .001 2.088 TO 2.092 ± .001 2.092 TO 2.096 ± .001 2.096 TO 2.100 ± .001 2.100 TO 2.104 ± .001 2.104 TO 2.108 ± .001 2.108 TO 2.112 ± .001 2.112 TO 2.116 ± .001 2.116 TO 2.120 ± .001 2.120 TO 2.124 ± .001 2.124 TO 2.128 ± .001 2.128 TO 2.132 ± .001 2.132 TO 2.136 ± .001 2.136 TO 2.140 ± .001 2.140 TO 2.144 ± .001 2.144 TO 2.148 ± .001 2.148 TO 2.152 ± .001 2.152 TO 2.156 ± .001 2.156 TO 2.160 ± .001 2.160 TO 2.164 ± .001 2.164 TO 2.168 ± .001 2.168 TO 2.172 ± .001 2.172 TO 2.176 ± .001 2.176 TO 2.180 ± .001 2.180 TO 2.184 ± .001 2.184 TO 2.188 ± .001 2.188 TO 2.192 ± .001 2.192 TO 2.196 ± .001 2.196 TO 2.200 ± .001 2.200 TO 2.204 ± .001 2.204 TO 2.208 ± .001 2.208 TO 2.212 ± .001 2.212 TO 2.216 ± .001 2.216 TO 2.220 ± .001 2.220 TO 2.224 ± .001 2.224 TO 2.228 ± .001 2.228 TO 2.232 ± .001 2.232 TO 2.236 ± .001 2.236 TO 2.240 ± .001 2.240 TO 2.244 ± .001 2.244 TO 2.248 ± .001 2.248 TO 2.252 ± .001 2.252 TO 2.256 ± .001 2.256 TO 2.260 ± .001 2.260 TO 2.264 ± .001 2.264 TO 2.268 ± .001 2.268 TO 2.272 ± .001 2.272 TO 2.276 ± .001 2.276 TO 2.280 ± .001 2.280 TO 2.284 ± .001 2.284 TO 2.288 ± .001 2.288 TO 2.292 ± .001 2.292 TO 2.296 ± .001 2.296 TO 2.			

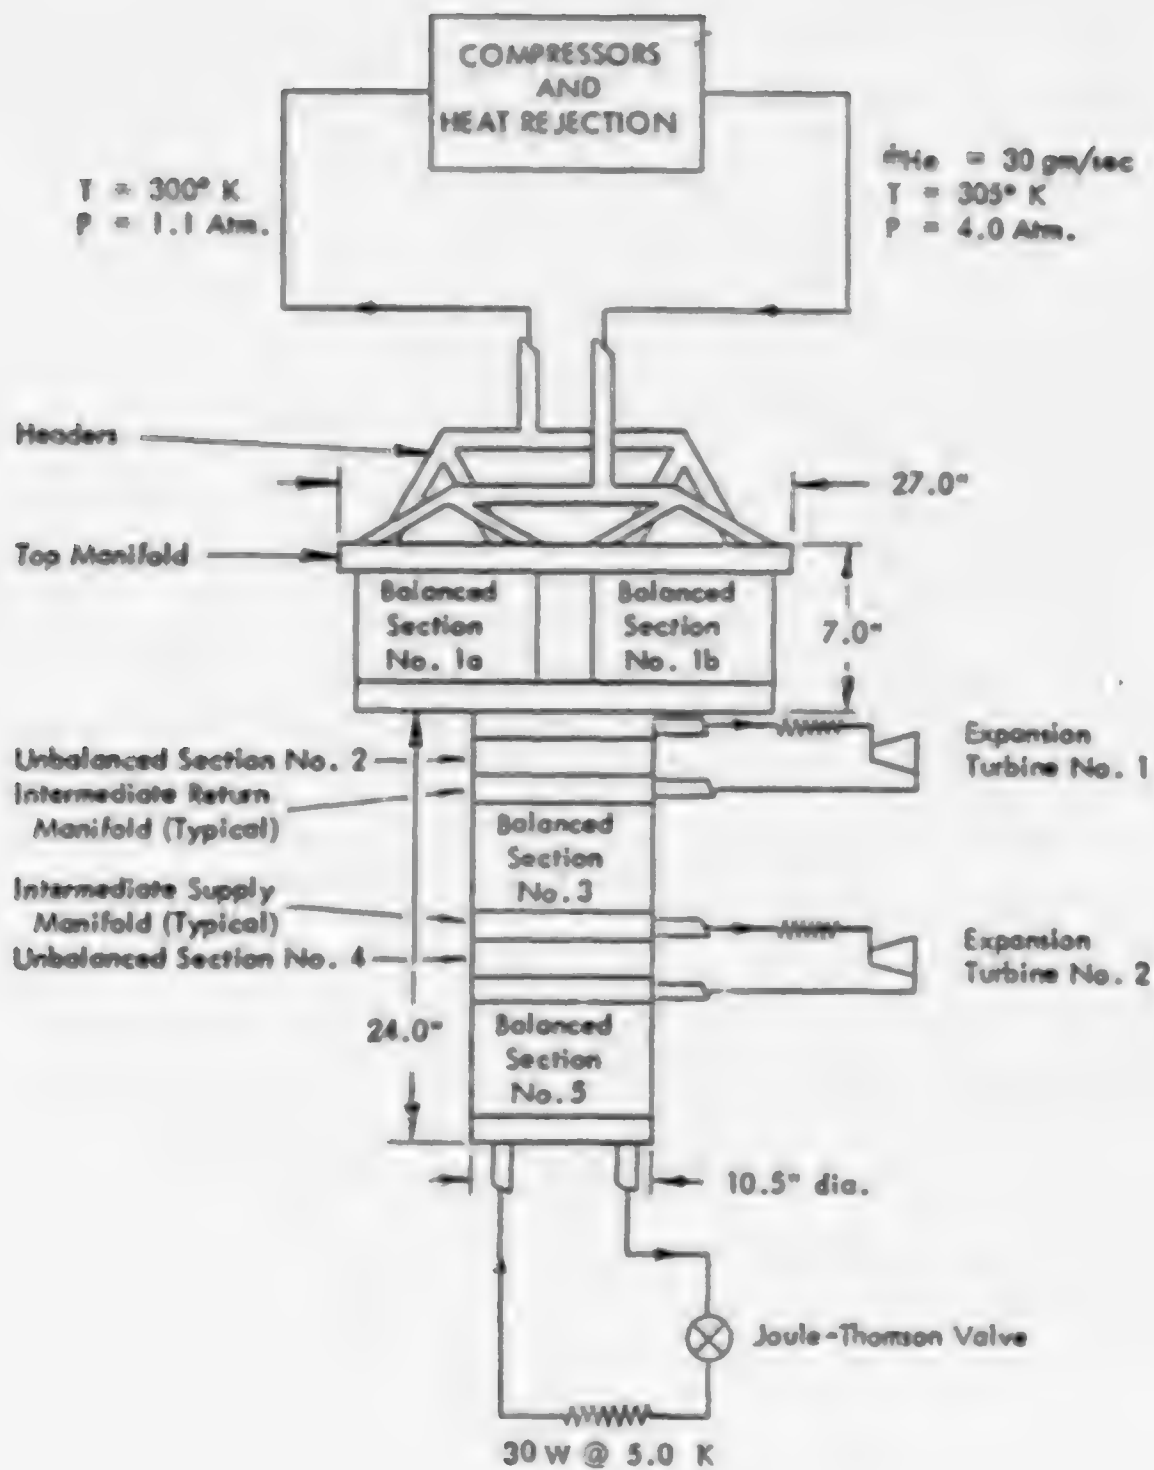


Figure 3-1 - Physical Schematic Diagram of Heat Exchanger

to the outer shell and the other end of the flange on the end of the port tube. Therefore, when the heat exchanger body expands or contracts longitudinally due to temperature changes, the bellows deflect laterally.

3.2 Detail Description

Figures 3-2 and 3-3 are the design layout drawings for the heat exchanger assembly. Figure 3-2 shows the overall configuration, while Fig. 3-3 shows the piping and flange details.

As described previously, the warmest balanced flow section is formed by placing two exchanger sections in parallel. Thus, the configuration and fabrication tooling for all the exchanger sections are essentially identical. This can be seen in the layout as the diameter of all the component sections are the same.

The top manifold is designed as a weldment of three items. The two circular ribbed portions which mate to the component sections are designed to be turned on an engine lathe, then welded into a milled housing.

The transitional manifold between the parallel and series components is also designed as a weldment to facilitate the ease of fabrication. As can be seen from the left-hand view in Fig. 3-2, the gas passages from the parallel to series portions are placed at the intersections of the circular manifolds.

It will be observed in the layout that bolts are used to place all of the component sections in overall compression. This has been found to be necessary in all exchangers of this type in order to reduce the stresses placed on the adhesive joints between the component sections and their respective manifolds.

The forces generated by the bolts are transmitted to the exchanger sections through Belleville springs. This is done to accommodate the large amount of longitudinal shrinkage which occurs when the assembly is cooled to operational temperature.

The bolts are machined from Inconel bar. Inconel is used because of its high strength so that cross-sectional area and thus longitudinal conduction can be held at a minimum.

The hollow volume in the center of each component exchanger section must be filled with insulating material, such as refrasil, to prevent convection currents from increasing the apparent longitudinal heat conduction.

The design of the piping arrangement for the inlet and outlet at the top of the assembly is shown in Fig. 3-3. The objective here is to achieve equal flow distribution for both the inlet and outlet flows.

The detail design of a typical port (there are six such ports) is pictured in Fig. 3-3. The port tube is flanged and threaded at the manifold end. There is a groove for a Bal-seal at the manifold to seal the joint. The seal at the shell around the exchanger is continued at the port through the use of a flexible steel bellows. The use of a bellows is essential to accommodate the longitudinal motion of the plastic exchanger with respect to the steel shell during operational cooldown.

It will be noted that the total assembly is designed to have all external joints welded at final assembly. This is done to achieve the objective of absolute helium leak tightness since the assembly is designed to fit into a vacuum chamber in the final system.

4.0 FABRICATION PROCESS

4.1 General Description

Fabrication procedures for the wire mesh screen and plastic heat exchanger modules are basically very simple. A thermosetting material (Narmco Metlbond 1113) is used in conjunction with wire mesh screen for construction. The die-cut Narmco parts, which contain all of the flow passages, conform to the designed cross-sectional dimensions of the module. The screen parts are die-cut to conform to the exterior cross-sectional dimensions of the module. In preparation for stacking the sandwich, the screen parts are put through a cleaning process to degrease and etch their surfaces.

Each epoxy-resin type plastic part is carefully aligned and pressed onto a screen part with a fixture used to aid in this procedure. Each new plastic-screen pair (referred to as a lamina) is carefully checked against a master lamina to ensure its uniformity. Limits are established as to allowable variation in lamina dimensions and any lamina not within these limits is rejected.

A pressing fixture is utilized to fabricate the finished heat exchanger module. The fixture is basically a container whose inner dimensions are close to the exterior cross-sectional shape of the module, with a hydraulic cylinder and piston mounted on one or both ends. The fixture has two basic functions, the first of which is to compress the stack of parts within it. A unit loading of 160 to 180 psi on the cross-sectional face of the parts stack is used. The second function of the fixture is to heat the stack to the required cure or flow temperature of the plastic. This may be accomplished either by circulating hot fluid through the fixture walls and core or enclosing the complete fixture in an oven.

Each part of lamina is stacked in the pressing fixture, one on top of the other, to form a multilayered sandwich of alternating screen and plastic parts. All parts or lamina are aligned with respect to each other by means of a stacking alignment fixture. During the stacking of parts or lamina, each piece is inspected visually to catch repairable and irreparable flaws. After it is stacked, it is again inspected for alignment with the part beneath it.

After the stack is heated and pressed, it is allowed to cool before removing from the fixture. The outside surfaces and each face are then machined smooth.

Initial leak testing of the module is accomplished by pressurizing each flow passage with nitrogen gas, removing the pressure source from the leak-test system, and observing the decay rate of the gas in the pressurized flow passage. Acceptable decay rates are dependent on the intended use for the heat exchanger.

4.2 Process Refinements Initiated During Project

A large part of the total effort on this program was spent refining various steps in the manufacturing process described in general in the preceding section.

A major factor in adjusting the fabrication process for this program was the type of epoxy laminate material commercially available for use. In previous epoxy plastic heat exchanger assemblies manufactured in the Kinergetics' facility, the epoxy laminate used was Metlbond #252 (manufactured by Narmco materials Corp.). Prior to inception of this project, the Metlbond #252 for which the process had been perfected was discontinued as a commercially available product. A new product, Metlbond #1113, was manufactured as a replacement. This change necessitated a re-evaluation of the exchanger section design and fabrication technique. Since the thickness of the new material was different, the thickness and/or porosity of the screen material which could be utilized to form a leak-tight section changed. Therefore, a search for theoretically correct screens and a production evaluation program was required to proceed with the new Narmco material. A number of usable screen wire and mesh sizes are available commercially and the particular selection is dependent on the NTU/ ΔP and NTU/volume considerations of the system. The screen must be chosen to present a unit area void volume slightly less than the unit area volume of a sheet of plastic. The Metlbond #1113 sheet is approximately 0.010 inch thick and some available screen sizes that meet this criterion are listed in Table II. Sections with acceptable leak-tightness were fabricated from the screen sizes marked with an asterisk.

A second effect of the above material change was the differing cure requirements and behavior of the new epoxy. Significant experimentation was required to determine the correct process temperatures and times. A serious problem surfaced

Table II
Wire Screens Usable with 0.010-Inch-Thick Plastic

Mesh	Wire diameter, in.	Void. Fract.	Effective thickness, in.	Hydraulic radius r_h , in.
60*	0.0075	0.615	0.0092	0.00300
60	0.0070	0.645	0.0090	0.00318
60	0.0650	0.675	0.0088	0.00340
60	0.0060	0.700	0.0084	0.00350
55	0.0070	0.678	0.0095	0.00370
65	0.0070	0.610	0.0085	0.00274
60-50	0.0075	0.645	0.0097	0.00340
55-60*	0.0075	0.620	0.0092	0.00320
50-60	0.0065	0.704	0.0091	0.00390

*Indicates that sections with acceptable leak-tightness have been fabricated from the given screen size.

as a tendency of the plastic to "bubble" under vacuum (formerly used in the process) and fixtures and methods of pressurizing the chamber with Helium had to be devised. This pressurization with inert gas cured the porosity problem.

Previous exchangers of the larger (10-1/2 inch) cross section had been fabricated from Polystyrene plastic. This was replaced by the Narmco for a number of reasons (principally overall section strength and reliable attachment of the manifolds during thermal cycling and at very low temperatures). Use of the Narmco necessitated several changes in the assembly procedures, however. Lamina cut from Narmco (which is a soft pliable material at room temperature) do not hold their shape well. It was therefore necessary to fabricate holding fixtures which positioned the lamina strips while the screen sections were lightly pressed on the plastic. This fixture, with a lamina installed and its protective covering partially peeled back, is shown in Figure 4-1.

It was also found to be necessary to lay the raw Narmco sheet on sheets of contact paper before punching. This produced good sharp edges on the lamina, and the contact paper facilitated handling. It was necessary, however, to chill the Narmco to remove the paper.

Since the wall sections of the lamina were relatively thin (to produce the maximum performance), alignment of the total part became critical. A viewing fixture was produced which allowed the assembled screen-lamina part to be placed in the pressing fixture and aligned with a reference pattern to make certain that all parts would be in alignment when finally assembled.

During the course of the program, significant variations in some properties of the Narmco between batches was noticed. A particularly important characteristic was the "tackiness" at room temperature. If the Narmco is not tacky, it will not stick to the screen, and the assembly process does not work. Discussions with the Narmco manufacturer revealed that the variations were random (a function of the specific gravity of the resin) and were not closely controlled because this property was not of great importance to the majority of their customers. It was finally determined that the lamina-screen assemblies could be formed with non-tacky Narmco by first heating the screens and plates in an oven and then lightly pressing the assemblies together.


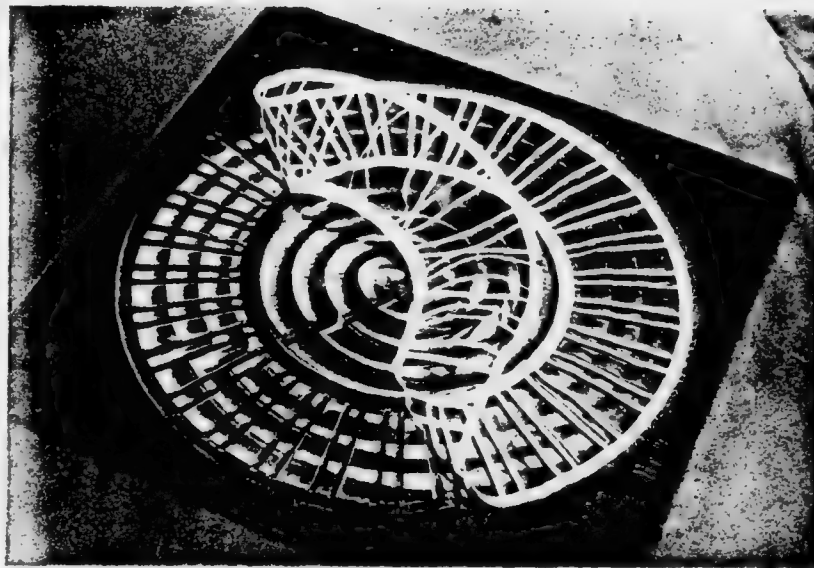


Figure 4-1 - Lamina Fixture with Lamina Installed


A final problem, which appeared at the end of the program, was a variation in screen thickness due to production tolerances. Wire mesh screen is formed from a grid of wires woven alternately over and under a perpendicular wire grid. If the weaving is done in such a manner that the deflection of the mutually perpendicular wires is equal, then a cross-section is obtained as shown in Figure 4-2a. The total thickness of this screen is then seen to be 2 x wire diameter. If, however, one set of wires remains straight, the cross-section becomes as shown in Figure 4-2b, and the total thickness is 3 wire diameters. Since the volume of wire is the same in either case, the effective void volume will vary by 50%.

The pressures exerted by the fabrication fixture are not sufficient to compress the screen to the 2 wire diameter thickness. Therefore, unless the screen is woven with a uniform crimp, the void volume will be too great, and the plastic will not fill the gaps, creating leakage paths.

It was determined, after lengthy discussions with screen manufacturers, that screen is specified only as to wire diameter and mesh, and the above thickness variations can occur randomly. Since it is not feasible for the plastic manufacturer to vary his thickness (except in large special orders), only the screen may be varied. It is therefore required that the screen be specially selected for thickness to allow usage in this exchanger fabrication process. It is expected that obtaining screen of the proper mesh, wire diameter, and thickness will be extremely difficult.

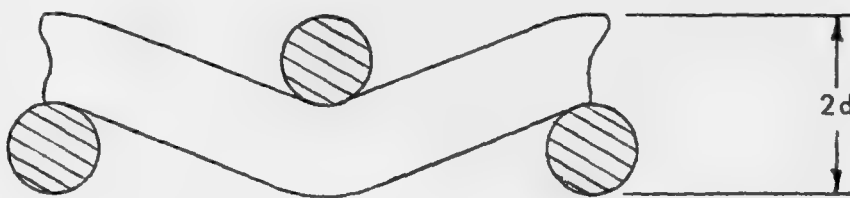

(a) Properly Formed

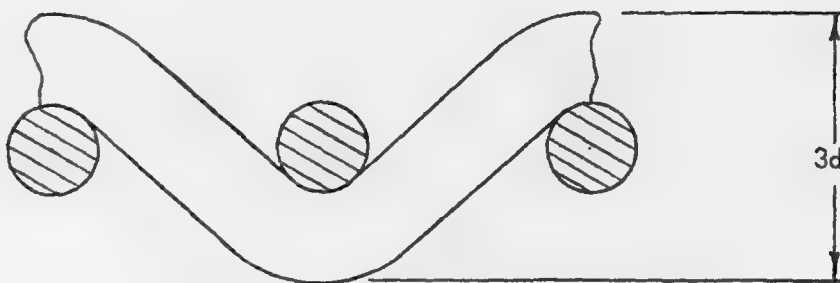

(b) Improperly Formed

Figure 4-2 - Examples of Variation in Thickness of Woven Screen

5.0 CONCLUSIONS AND RECOMMENDATIONS

As stated previously, the objectives of this program were to demonstrate the feasibility of fabricating a wire screen and plastic composite heat exchanger and to utilize the manufacturing process to fabricate a set of compact high-performance cryogenic heat exchangers. The objective of demonstrating the feasibility of manufacturing the component sections of this type was achieved. Several leak-tight sections were manufactured utilizing the process developed during the project. Due to the amount of effort expended in developing the manufacturing techniques, it was not possible to accomplish the second objective within the scope of the program.

As has been described previously, the manufacturing process which was developed to fabricate the heat exchangers displayed extreme sensitivity to various physical parameters of the materials used in the process. As a result, most of the effort expended on the project was spent in developing techniques to desensitize the process to the greatest extent possible.

It is recommended that if such a project be undertaken in the future, that effort be included in the project to generate the necessary materials specifications to which the raw materials would be procured. This would possibly increase the projected cost and lead time over past projections, but would vastly improve the process yield and production rate.

APPENDIX A

PURCHASE DESCRIPTION
FOR A SET OF
CRYOGENIC HEAT EXCHANGERS

1.0 Scope of Work

This Purchase Description covers the design, fabrication, and test of a set of compact, high-performance, cryogenic heat exchangers. The set of heat exchangers is required as a major component in an advanced design multi-stage Claude cycle cryogenic refrigeration system.

2.0 Objectives

The work specified in this Purchase Description has the following objectives:

- 2.1 To demonstrate the feasibility of manufacturing compact heat exchangers by bonding wire screens into low thermal conductivity material.
- 2.2 To fabricate a set of compact, high-performance, cryogenic heat exchangers suitable for integration into a Claude cycle refrigeration system.

3.0 General

Advanced multi-stage Claude cycle cryogenic refrigeration systems, using helium gas as the refrigerant, are being designed to run for at least 2,000 hours without major maintenance. To be compatible with these systems, the design life of the set of heat exchangers will be at least 2,000 hours. The heat exchangers will also be designed for high-effectiveness and low volume. While carrying out this work, the contractor will coordinate closely with U. S. Army technical representatives to provide for the successful integration of the heat exchangers with the other components of the system.

4.0 Procedure

The following procedure shall be used:

4.1 Heat Exchanger Specifications

The advanced multi-stage Claude cycle refrigeration system will consist of at least one expansion turbine and Joule-Thomson valve. The system is expected to operate between room temperature and 4.4 K with a pressure ratio across the room temperature compressor of approximately 4. The overall mass flow into the warmest heat exchangers will be approximately 40 g/sec. The set of compact, high-performance heat exchangers will operate between 300 K and 10 K. The balanced flow effectivenesses of the individual heat exchangers comprising the set will be in the range from 98% to 99%. The ratio of the cold-side pressure drop to the inlet cold-side pressure for the set of heat exchangers will not exceed 5%. The flow passages of the heat exchangers will be designed to minimize flow maldistributions which can limit effectivenesses to below the required range of 98 to 99%. The volume of the set of heat exchangers will be kept as small as possible consistent with the other proceeding specifications. It is recognized that some changes in the proceeding specifications may be desirable in order to insure the successful fabrication of the set of heat exchangers and the integration of them with other components. The final heat exchanger specifications will be determined at a meeting with the Army technical representatives no later than three weeks after the effective date of the contract.

4.2 Headers

In addition to the individual heat exchangers, headers shall be provided to permit:

- 1) expansion turbines to be attached in parallel with unbalanced flow heat exchangers,
- 2) the Joule-Thomson valve to be attached directly to the cold end of the bottom balanced flow heat exchanger, and
- 3) the warm end of the top balanced flow heat exchanger to be attached to a room temperature flange.

The warm end header shall permit the set of heat exchangers to be rigidly supported from a room temperature flange and shall be the only means of support for the heat exchangers. The details of the rigid support will be worked out with the Army's technical representatives. The headers will be designed to minimize flow maldistributions which limit the thermal performance of the heat exchangers.

4.3 Structure

The set of heat exchangers and headers shall be fabricated as a single unit and shall be the principal structural member of the refrigeration system. Whenever practical, components will be directly suspended from the heat exchangers to minimize heat leaks due to externally supporting components from the room temperature flange.

4.4 Component Attachment

The expansion turbines and the Joule-Thomson valve shall be attached to the appropriate headers by means of demountable vacuum seals. The Army shall supply stainless steel flanges with Indium O-rings for this purpose. The flat flanges shall be welded to the headers. The size of the intermediate pipes between the flat flanges and the headers shall be chosen by the Army on the basis of providing rigid mechanical strength for possible component support and minimizing pressure drops in these pipes. Similar flanges and pipes shall be welded to the warm end header to enable the set of heat exchangers to be connected to a room temperature compressor.

4.5 Cleanliness

Cleanliness procedures shall be observed during assembly. Heat exchanger parts and headers shall be degreased and ultrasonically cleaned before assembly. The set of exchangers shall be packaged for shipping in a clean heat-sealed plastic bag with dry nitrogen packed inside.

4.6 Thermal Cycling

Before leakage testing, each heat exchanger shall be cycled between room temperature and liquid nitrogen temperature at least three times. Each cycle must be performed in less than one hour. The cycling may be performed by completely submerging the heat exchangers in liquid nitrogen.

4.7 Cryogenic Free Flow Test

The pressure drop across the entire set of heat exchangers shall be measured with helium gas flowing at not less than 0.5 g/sec while the warm end is maintained at room temperature and the cold end is maintained at liquid nitrogen temperature. This measured pressure drop shall be less than the pressure drop measured with helium gas flowing at the same mass flow rate across the same experimental set-up at room temperature.

4.8 Stream-to-Stream Leakage

After performing 4.6 and 4.7, the stream-to-stream leakage shall be measured in the set of heat exchangers at room temperature. With all parts of the headers blocked, except for one part on each side, the exchangers shall be pressurized on one side with helium gas at 20 psig. The other side shall be evacuated and sealed. The pressure vs. time shall be measured for at least 24 hours. An acceptable leakage rate will be 1×10^{-3} atm - cm³/sec, which is approximately bubble tightness.

4.9 External Leakage Test

Leaks through the outer walls of the set of heat exchangers shall be measured with a helium mass spectrometer having a sensitivity of at least 10^{-8} Torr-liters/ sec. The external leakage test shall be performed after 4.6 and 4.7. A vacuum tight enclosure, surrounding the set of heat exchangers, shall be connected to the leak detector. This test shall be performed at room temperature. The inside volume of the set of heat exchangers shall be flushed with nitrogen gas to remove residual helium gas which would cause a background reading to occur on the leak detector and erroneously indicate leakage. Nitrogen and helium gas alternately will be introduced into the heat exchangers while the leak detector readings are monitored. Any leaks located in this manner shall be repaired.

4.10 Pressure Drop Test

Both streams of each heat exchanger in the set shall be tested with nitrogen gas flowing at room temperature and near atmospheric pressure. A pressure drop vs. mass flow rate curve for each heat exchanger shall be determined.

4.11 Final Report

The report shall contain the design and test data of the set of heat exchangers designed and fabricated under this contract. Appropriate drawings and documentation will be provided to fully describe the heat exchangers.

5.0 Design Approval

Prior to initiating fabrication of the heat exchangers and headers, the Contractor shall submit to the U. S. Army Technical Representative at Fort Belvoir, Virginia

Commander
U. S. Army Mobility Equipment R&D Center
Attn: SMEFB-EA (Contract No. DAAK02-73-C-0323)
Fort Belvoir, Virginia 22060

for approval drawings and design data in sufficient detail to completely describe the design of the set of heat exchangers and the expected performance. Approval of the drawings and design data will indicate that no obvious defects are evident in the data submitted and this approval shall in no way relieve the contractor of the responsibility for supplying a set of heat exchangers meeting the specifications of the purchase request. The contractor shall proceed to fabricate the set of heat exchangers upon receipt of written approval.